



Dynamic Inclinometer With Analog Outputs B1NF360V-QR20-2LI2X3-H1151

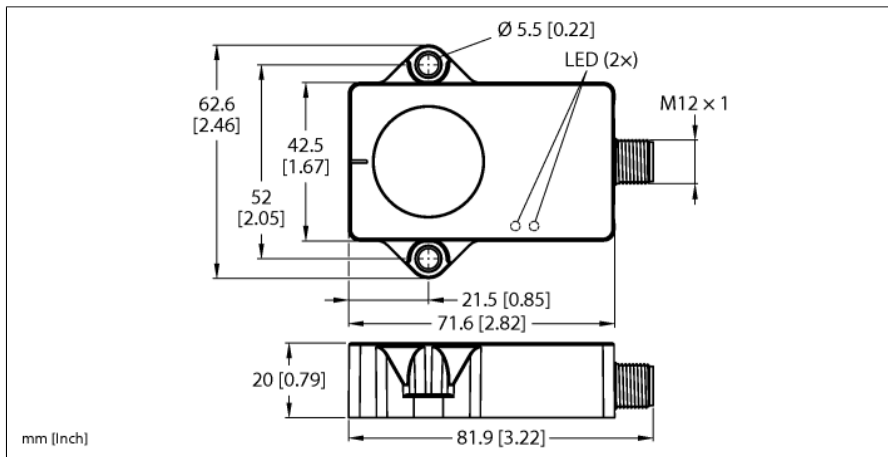

Type	B1NF360V-QR20-2LI2X3-H1151
ID	100030754
Measuring principle	Combination of gyroscopes and accelerometers
General data	
Resolution	16 bit
Measuring range	0...360°
Number of measuring axes	1
Repeat accuracy	≤ 0.03 % of full scale
Linearity deviation	≤ 0.15 %
Temperature drift	≤ ± 0.006 %/K
Electrical data	
Operating voltage U_s	15...30 VDC
Ripple U_{ss}	≤ 10 % U_{Bmax}
Isolation test voltage	0.5 kV
Short-circuit protection	yes
Wire break/reverse polarity protection	yes/yes
Output function	5-pin, Analog output
Current output	4...20 mA
Load resistance voltage output	≥ 4.7 kΩ
Load resistance current output	≤ 0.4 kΩ
Current consumption	< 80 mA
Mechanical data	
Design	Rectangular, QR20
Dimensions	71.6 x 62.6 x 20 mm
Housing material	Plastic, Ultem
Electrical connection	Connector, M12 × 1

- Rectangular, plastic, Ultem
- Status displayed via LED
- Angle detection via one axis with 360 ° measuring range
- High protection class IP68/IP69K
- Protected against salt spray and rapid temperature change
- 15...30 VDC
- M12 × 1 male connector, 5-pin
- Two counter-running 4...20 mA analog outputs improve machine safety through redundancy
- The start, end and center point of the measuring range can be adjusted using teach adaptor TX1-Q20L60
- Individual parameterization possible with USB-2-IOL-0002

Wiring Diagram

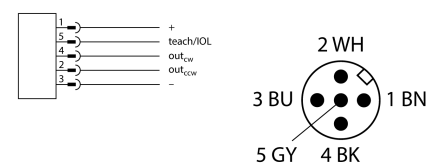

Functional principle

The dynamic inclinometers use an acceleration measuring cell and a gyroscope sensor to determine angles. Influences caused by vibrations or interfering acceleration are minimized by applying an intelligent fusion algorithm to the acceleration data and the rotation rate values. This enables the sensor to output a robust signal with impressive precision and speed, even in moving, dynamic applications. The robust sensors are positioned with the cast side on a flat surface so that the casting

Environmental conditions	
Ambient temperature	-40...+85 °C
Temperature changes (EN60068-2-14)	-40... +85 °C; 20 cycles
Vibration resistance (EN 60068-2-6)	20 g; 5 h/axis; 3 axes
Shock resistance (EN 60068-2-27)	200 g; 4 ms ½ sine
Protection class	IP68
	IP69K
MTTF	297 years acc. to SN 29500 (Ed. 99) 40 °C
Power-on indication	
	LED, Green
Measuring range display	LED, yellow
UL certificate	E351232

compound is covered. The sensor is then secured with two screws.

Programming instructions

Activation of the teach process

	Bridge between pin 5 and pin 1	LED green	LED yellow
Activate teaching	Before switching on the supply voltage, set the teach bridge, then switch on the voltage, then remove the bridge immediately after starting the sensor	Teach process active: 700 ms/100 ms	
The teach process is automatically deactivated after 30 s. The yellow CENTER LED and the green LED flash alternately and then return to normal operation.			

Teach sequence for center point, measuring range start and end

	Bridge between pin 5 and pin 1	LED green	LED yellow
Activate sequence*	Set bridge for 2...8 s	After 2 s of flashing at 1 Hz	
Set center point**	Bridge for 2...8 s		After 2 s of flashing at 1 Hz
Set start of measuring range**	Bridge for 8...14 s		After 8 s of flashing at 2 Hz
Set end of measuring range**	Bridge for 14...20 s		After 14 s of flashing at 4 Hz

Factory setting

	Bridge between pin 5 and pin 1	LED green	LED yellow
Activate sequence for factory settings*	Bridge for 8...14 s	After 2 s of flashing at 2 Hz	
Reset to factory settings**	Bridge for 2...8 s		After 2 s of flashing at 1 Hz

*Teach sequence remains active for 30 s, then returns to normal operation

**After the center point/measuring range/factory settings have been established, the teach sequence ends and automatically returns to the activated teach process

