


## Accessories Coaxial Tube For LS-5 Series LSCT-34-0600



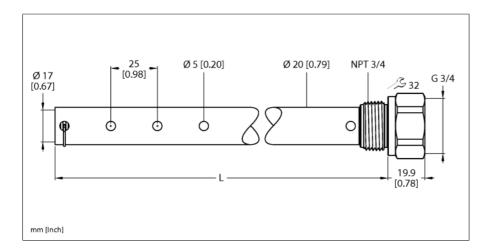

- Coaxial tube LS-5 level sensors
- Process connection NPT 3/4"
- Tube length 600 mm

Туре	LSCT-34-0600	
ID	100001881	
Remark to product	Attention: Coaxial tubes (accessories) are only avail-	
	able for LS-551 level sensors with process connec-	
	tion G3/4".	
Application area	liquids	
Probe length (L)	600 mm	
Mechanical data		
Material	Stainless steel, 1.4571	
Process connection	3/4" NPT	
Included in delivery	Centering set for LSCT	

## **Functional principle**

The level sensors of the LS-5 series work according to the principle of the guided microwave. The so-called Time Domain Reflectometry (TDR) is used. This method emits an electromagnetic wave along the probe. When the wave reaches the medium, it is partially reflected due to the dielectric constant compared to air. The electromagnetic wave is picked up again by the sensor and the distance to the liquid can now be determined via the transit time.



## **Accessories**

Type code	Ident no.		Dimension drawing
LSAB2	100016515	PTFE centering star for mounting probes in the LS-5 product series in LSCT-xx-xxxx coaxial tubes	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1