



Module d'extension piconet pour IP-Link 4 entrées analogiques pour Pt100 SNNE-40A-0009

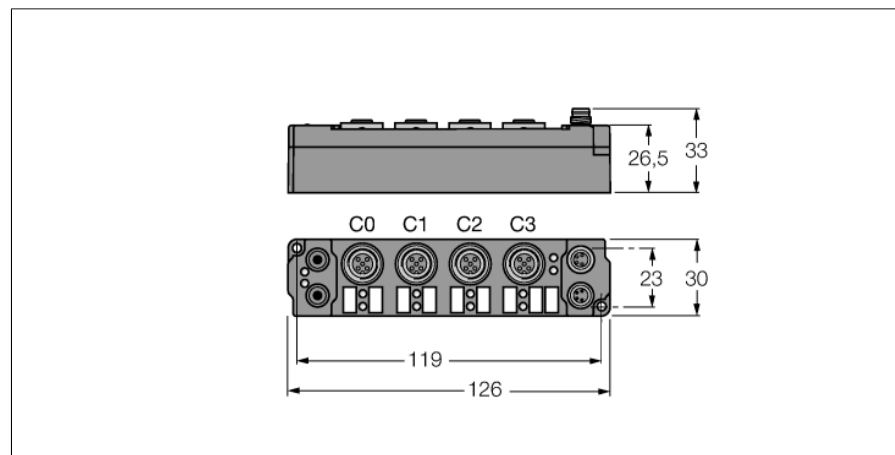


- 4 entrées analogiques pour Pt100
- raccordement IP-Link direct
- boîtier renforcé par fibres de verre
- électronique de module surmoulée
- connecteur métallique
- mode de protection IP67


Entrée M12 x 1



variante de raccordement - entrées

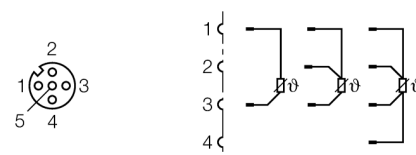

alimentation en tension M8 x 1



Type	SNNE-40A-0009
N° d'identification	6824176
Nombre de canaux	4
Tension de service/en décharge	20...29 VCC
Courant de service	≤ 40 mA
Longueur fibre optique	≤ 15 m
Nombre de canaux	4 entrées analogiques Pt100
Isolation	canaux pour la tension de service
Type de détecteur	Pt100
Plage de température	-200 à 850 °C (capteurs Pt), -60 à 250 °C (capteurs Ni)
Courant de mesure	0,1 °C
Temps de conversion	250 ms
Erreur de mesure relative	< ±1,0 % de la valeur finale
Filtre d'entrée	variable
Alimentation de détecteur	de la tension de service
Dimensions (L x H x P)	30 x 126 x 26.5 mm
Test de vibrations	Suivant EN 60068-2-6
Contrôle de chocs	suivant EN 60068-2-27
Compatibilité électromagnétique	Suivant EN 61000-6-2/EN 61000-6-4
Mode de protection	IP67
Homologations	CE, cULus

LED

	LED designation	Status green	Status red	Function
IP-Link / module status	RUN / ERR (I/O)	flickers/ON	OFF	Receiving error-free IP-Link protocols
		flickers	flickers	Receiving faulty IP-Link protocols
		OFF	flickers	Receiving faulty IP-Link protocols / system fault
		OFF	ON	No receipt of IP-Link protocols / module error
Inputs	R / E (1...4)	OFF		No data transmission
		ON		Data transmission to D/A converter
			OFF	Error-free data transmission
			ON	Wire break, measured value out of measuring range, etc.
Power supply	U _B	OFF		Operating voltage U _B < 18 VDC
		ON		Operating voltage U _B ≥ 18 VDC
	U _L	OFF		Load voltage U _L < 18 VDC
		ON		Load voltage U _L ≥ 18 VDC

données dans l'image de processus

		Address	Input data		Output data	
		Word	High-Byte	Low-Byte	High-Byte	Low-Byte
Valid for the setting "Motorola format"	Pre-conditions					
	Compact mapping: Starting with Ch0 D1 in "Low-Byte" word 0 all other bytes follow immediately. Only the user data are mapped (greyed in the table). Complex mapping: Data are mapped with control and status byte.	0	Ch0 D1	SB0	Ch0 D1	CB0
		1	SB1	Ch0 D0	CB1	Ch0 D0
		2	Ch1 D0	Ch1 D1	Ch1 D0	Ch1 D1
		3	Ch2 D1	SB2	Ch2 D1	CB2
		4	SB3	Ch2 D0	CB3	Ch2 D0
		5	Ch3 D0	Ch3 D1	Ch3 D0	Ch3 D1