


用于IP-Link的piconet扩展模块


8 Digital Outputs 0.5 A

SNNE-0008D-0006

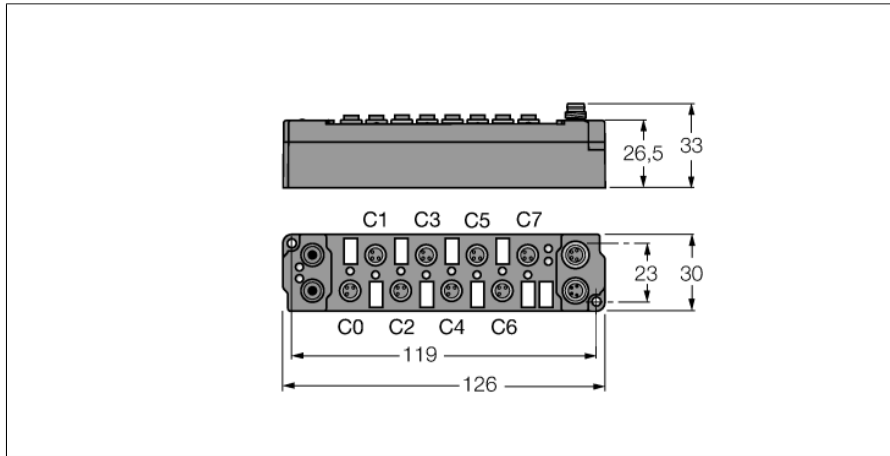


- 直接连接至IP Link
- 玻璃纤维加固外壳
- 模块电路封装
- 金属接插件
- 防护等级IP67

M8 × 1 输出



M8 × 1 电源

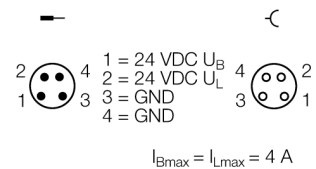

型号	SNNE-0008D-0006
货号	6824185
通道数	8
工作/负载电压	20...29 VDC
工作电流	≤ 25 mA
Fibre-optic length	≤ 15 m
通道数	8 通道数字量输入, 根据 EN 61131-2
输出电压	20...29 VDC, 来自负载电压
通道输出电流	0.5 A, 短路保护
负载类型	阻性, 感性, 灯
开关频率	≤ 500 Hz
同步因数	1
尺寸 (长/宽/高)	30 x 126 x 26.5 mm
振动测试	符合EN 60068-2-6标准
冲击测试	根据 DIN EN 60068-2-27
电磁兼容性	符合EN 61000-6-2/EN 61000-6-4标准
防护等级	IP67
认证	CE, cULus

过程映像中的数据

		Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0	
PROFIBUS-DP coupling module: "Byte alignment" is disabled (default) and byte n has been used halfway. DeviceNet™, CANopen, INTERBUS, Ethernet coupling module: Byte n has been used halfway. Up to 8 bit user data are mapped.	Output	Byte n (M8)	C3P4	C2P4	C1P4	C0P4	is used by the physically preceding bit-oriented extension module connected via the IP Link.			
		Byte n (M12)	C1P2	C1P4	C0P2	C0P4				
		Byte n+1 (M8)	is used by the physically following bit-oriented extension module connected via the IP Link.				C7P4	C6P4	C5P4	C4P4
		Byte n+1 (M12)					C3P2	C3P4	C2P2	C2P4
PROFIBUS-DP coupling module: "Byte alignment" is disabled (default) and the previous byte has been completely used or "byte alignment" is active. DeviceNet™, CANopen, INTERBUS, Ethernet coupling module: The previous byte has been completely used. Up to 8 bit user data are mapped.	Output	Byte n (M8)	C7P4	C6P4	C5P4	C4P4	C3P4	C2P4	C1P4	C0P4
		Byte n (M12)	C3P2	C3P4	C2P2	C2P4	C1P2	C1P4	C0P2	C0P4
		C... = Connector no. – P... = Pin no.								