
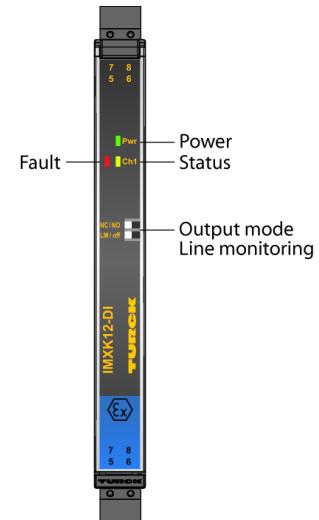


Isolating switching amplifier 1-channel IMXK12-DI01-1S-1R-0/24VDC/CC

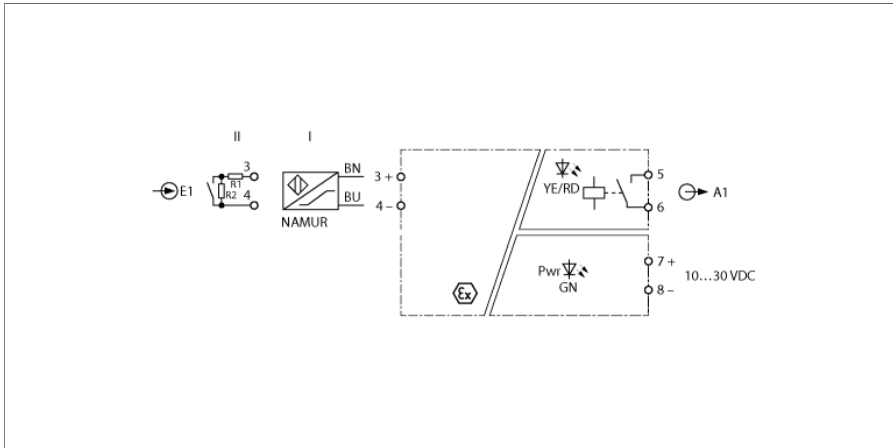

Sensors according to EN 60947-5-6 (NAMUR) or potential-free contacts can be connected to the IMXK12-DI01-1S-1R-0/24VDC/CC 1-channel isolating switching amplifier. The device is equipped with an intrinsically safe input circuit and can be installed in zone 2. The output circuit is equipped with a changeover relay. The device complies with the requirements of NE21.

The devices feature DIP switches on the front. These allow input circuit monitoring and the direction of action to be selected. When using mechanical contacts, either line monitoring must be switched off or the contact must be wired with resistors (see wiring diagram).


The green LED indicates operational readiness. An error in the input circuit causes the red LED to flash according to NE44. The relay of the corresponding output circuit drops out.

The device can be used in safety circuits up to SIL2 (high and low demand according to IEC 61508).

The device is equipped with removable spring type terminals.


- Relay output
- Adjustable output mode (NO/NC mode)
- Input monitored for wire breaks/short circuits (ON/OFF switchable)
- Complete galvanic isolation
- Input reverse-polarity protected
- Removable cage clamp terminals
- ATEX, IECEx, cUL
- Installation in zone 2
- SIL 2

Type	IMXK12-DI01-1S-1R-0/24VDC/CC
ID	100000680
Nominal voltage	24 VDC
Operating voltage U_s	10...30 VDC
Power consumption	$\leq 1 \text{ W}$
Power dissipation, typical	$\leq 1.04 \text{ W}$
NAMUR input	
NAMUR	EN 60947-5-6
Input circuit monitoring	on/off switchable
No-load voltage	8.2 VDC
Short-circuit current	8.2 mA
Input resistance	1 k Ω
Cable resistance	$\leq 50 \Omega$
Switch-on threshold	1.75 mA
Switch-off threshold	1.55 mA
Wire breakage threshold	$\leq 0.06 \text{ mA}$
Short-circuit threshold	$\geq 6.4 \text{ mA}$
Output circuits	
Output circuits (digital)	1 x relay (change-over)
Output switching voltage relay	$\leq 30 \text{ VDC} / \leq 250 \text{ VAC}$
Switching current per output	$\leq 2 \text{ A}$
Switching capacity per output	$\leq 500 \text{ VA}/60 \text{ W}$
Switching frequency	$\leq 15 \text{ Hz}$
Contact quality	AgNi
Galvanic isolation	
Test voltage	2.5 kV RMS
Input 1 to output 1	375 V peak value acc. to EN 60079-11
Input 1 to supply	375 V peak value acc. to EN 60079-11
Output 1 to supply	300 V RMS acc. to EN 50178 and EN 61010-1
Important note	
	For Ex-applications the values specified in the corresponding Ex certificates (ATEX, IECEx, UL, etc.) apply.
Ex approval acc. to conformity certificate	TÜV 14 ATEX 147004 X
Application area	II (1) G, II (1) D
Ignition protection category	[Ex ia Ga] IIC; [Ex ia Da] IIIC
Application area	II 3 (1) G
Ignition protection type	Ex nA nC [ia Ga] IIC T4 Gc
Important note	If the device is used in applications to achieve functional safety according to IEC 61508, the safety manual must be used. Information in the data sheet are not valid for functional safety.
Use in SIL safety circuits	SIL 2 acc. to IEC 61508
Displays/Operating elements	
Operational readiness	Green
Switching state	Yellow
Error indication	red



Mechanical data		
Protection class	IP20	
Flammability class acc. to UL 94	V-0	
Ambient temperature	-25...+70 °C	
Storage temperature	-40...+80 °C	
Dimensions	80 x 12.5 x 128 mm	
Weight	1 g	
Mounting instructions	DIN rail (NS35)	
Housing material	Plastic, Polycarbonate/ABS	
Electrical connection	Removable spring-type terminals, 2-pin	
Terminal cross-section	0.2...2.5 mm ² (AWG: 24...14)	
Environmental conditions	Operating height	Up to 2000 m above sea level
	Pollution degree	II
	Surge/Overvoltage category	II (EN 61010-1)
	Standards used	
	Voltage resistance and insulation	
		EN 50178
		EN 61010-1
		EN 50155
		GL VI-7-2
	Shock	
		EN 61373 class B
		EN 50155
		GL VI-7-2
		EN 60068-2-6
		EN 60068-2-27
	Temperature	
		EN 60068-2-1 Ad
		EN 50155
		GL VI-7-2
		EN 60068-2-2 Bd
		EN 60068-2-1
	Air humidity	
		EN 60068-2-38
	EMC	
		EN 50155
		GL VI-7-2
		NE21
		EN 61326-1
		EN 61326-3-1
		EN 61000-4-2
		EN 61000-4-3
		EN 61000-4-4
		EN 61000-4-5
		EN 61000-4-6
		EN 61000-4-11
		EN 61000-4-29
		EN 55011
		EN 55016
		EN 50121-3-2
		EN 61000-6-2

Accessories

Type code	Ident no.		Dimension drawing
IMX12-CC-2X-4BK	7580942	Spring terminals for IM(X)12 modules; included in delivery: 4 pcs. black terminals, 2-pin	
IMX12-CC-2X-4BU	7580943	Spring terminals for IM(X)12 modules; included in delivery: 4 pcs. blue terminals, 2-pin	
IMX12-SC-2X-4BK	7580940	Screw terminals for IM(X)12 modules; included in delivery: 4 pcs. of 2-pin black terminals	
IMX12-SC-2X-4BU	7580941	Screw terminals for IM(X) 12 modules; included in delivery: 4 pcs. of 2-pin blue terminals	
WM1 WIDER-STANDSMODUL	0912101	The resistor module WM1 meets the requirements for line monitoring between a mechanical contact and a TURCK signal processor. The input circuit of the signal processor is designed for sensors acc. to EN60947-5-6 (NAMUR) and equipped with a wire-break and short-circuit monitoring function.	