

B2N60H-Q20L60-2LI2-H1151/S97



Inclinometer – With Increased Temperature Range



Features




- Plastic, PC
- Zero point calibration $\pm 15^\circ$
- Two analog outputs
- M12 x 1 male connector

Wiring diagram



Functional principle

Inclination is determined by a wear-free semiconducting sensor element.

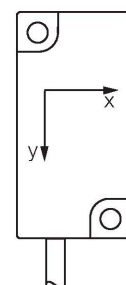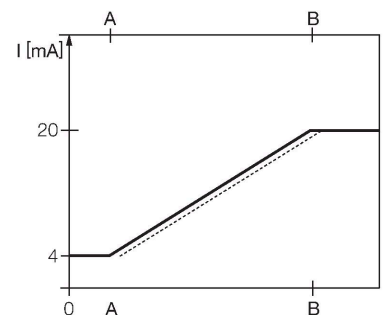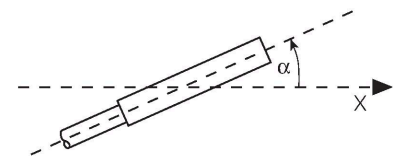

Technical data


Type	B2N60H-Q20L60-2LI2-H1151/S97
ID	1534046
Measuring principle	Acceleration
General data	
Measuring range	$-60 \dots 60^\circ$
Measuring range x-axis	$-60 \dots 60^\circ$
Measuring range y-axis	$-60 \dots 60^\circ$
Number of measuring axes	2
Repeatability	$\leq 0.2\%$ of measuring range A - B
Linearity deviation	$\leq 0.5\%$
Temperature drift	$\leq \pm 0.03\%/K$
	for temperature range between -40°C and $+85^\circ\text{C}$
Resolution	$\leq 0.14^\circ$
Electrical data	
Operating voltage	10...30 VDC
Isolation test voltage	$\leq 0.5\text{ kV}$
Short-circuit protection	yes
Wire breakage/Reverse polarity protection	no / yes
Output function	5-pin, Analog output
Current output	4...20 mA
Load resistance current output	$\leq 0.2\text{ k}\Omega$
Response time	0.1 s
	time for the output signal to achieve 90% of full scale if the angle changes from -60° to $+60^\circ$
Current consumption	50 mA

Technical data

Mechanical data	
Design	Rectangular, Q20L60
Dimensions	60 x 30 x 20 mm
Housing material	Plastic, PC
Electrical connection	Connector, M12 × 1
Environmental conditions	
Ambient temperature	-40...+70 °C
Vibration resistance	55 Hz (1 mm)
Shock resistance	30 g (11 ms)
Protection class	IP68 IP69K
MTTF	203 years

Mounting instructions

Mounting instructions/Description

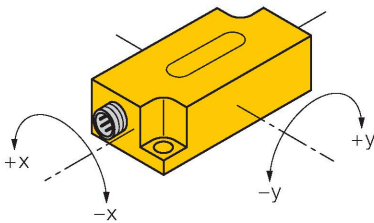

Teaching


The zero point can be adjusted with teach adapter TX1-Q20L60. Teach-GND is pressed for approx. 1 s to do this. The outputs are switched to 20 mA as confirmation. Teach-GND is pressed for 6 s to reset the axis zero points. The outputs are switched to 4mA as confirmation. Once the teach button is released, the sensor returns to normal operation.

Accessories

GUARD-Q20L60

A9684

Protective housing for Q20L60 inclinometers for protecting against mechanical impact; material: Stainless steel



Accessories

Dimension drawing	Type	ID	
	TX1-Q20L60	6967114	Teach adapter for inductive encoders, linear position, angle, ultrasonic and capacitive sensors