


RU600U-M30E-LIU2PN8X2T-H1151

Ultrasonic Sensor – Diffuse Mode Sensor

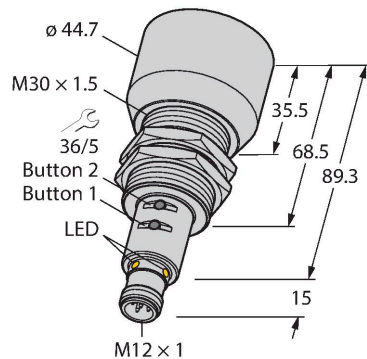


Technical data

Type	RU600U-M30E-LIU2PN8X2T-H1151
ID	1610049
Ultrasonic data	
Function	Proximity switch
Range	600...6000 mm
Resolution	1 mm
Minimum measuring range	500 mm
Minimum switching range	50 mm
Ultrasound frequency	75 kHz
Repeat accuracy	≤ 0.15 % of full scale
Temperature drift	± 1.5 % of full scale
Linearity error	≤ ± 0.5 %
Edge lengths of the nominal actuator	100 mm
Approach speed	≤ 11 m/s
Pass speed	≤ 3.7 m/s
Electrical data	
Operating voltage U_B	15...30 VDC
Residual ripple	10 % U_{ss}
DC rated operating current I_o	≤ 150 mA
No-load current	≤ 50 mA
Load resistance	≤ 1000 Ω
Residual current	≤ 0.1 mA
Response time typical	< 380 ms
Readiness delay	≤ 300 ms
Communication protocol	IO-Link
Output function	NO/NC, PNP/NPN, analog output
Output 1	Switching output or IO-Link mode

Features

- Smooth sonic transducer face
- Cylindrical housing M30, potted
- Connection via M12 x 1 male
- Measuring range adjustable via teach button/Easy-Teach
- Temperature compensation
- Blind zone: 60 cm
- Range: 600 cm
- Resolution: 1 mm
- Aperture angle of sonic cone: ±15 °
- 1 × switching output, PNP/NPN
- 1 × analog output, 4...20 mA / 0...10 V / additional switching output, PNP/NPN
- NO/NC programmable
- Transmission of process value and parametrization via IO-link

Wiring diagram

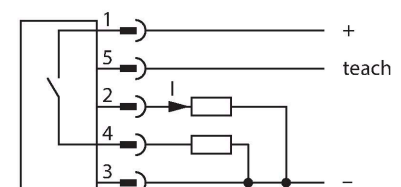

Functional principle

Ultrasonic sensors capture a multitude of objects contactlessly and wear-free with ultrasonic waves. It does not matter whether the object is transparent or opaque, metallic or non-metallic, firm, liquid or powdery. Even environmental conditions such as spray, dust or rain hardly affect their function. The sonic cone diagram indicates the detection range of the sensor. In accordance with standard EN 60947-5-7, quadratic targets in a range of sizes (20 × 20 mm, 100 × 100 mm) and a round rod with a diameter of 27 mm are used.

Technical data


Output 2	Analog output
Current output	4...20 mA
Load resistance current output	≤ 0.5 kΩ
Voltage output	0...10 V
Load resistance voltage output	≥ 1 kΩ
Switching frequency	≤ 1.6 Hz
Hysteresis	≤ 50 mm
Voltage drop at I _e	≤ 2.5 V
Short-circuit protection	yes/Cyclic
Reverse polarity protection	yes
Wire breakage protection	yes
Setting option	Push Button Remote Teach IO-Link

IO-Link	
IO-Link specification	V 1.1
IO-Link port type	Class A
Communication mode	COM 2 (38.4 kBaud)
Process data width	16 bit
Measured value information	15 bit
Switchpoint information	1 bit
Frame type	2.2
Minimum cycle time	2 ms
Function pin 4	IO-Link
Function Pin 2	DI
Maximum cable length	20 m
Profile support	Smart Sensor Profile
Included in the SIDI GSDML	Yes

Mechanical data	
Design	Threaded barrel, M30
Radiation direction	straight
Dimensions	Ø 44.7 x 104.3 mm
Housing material	Metal, CuZn, Nickel Plated
Max. tightening torque of housing nut	75 Nm
Transducer material	Plastic, Epoxyd resin and PU foam
Electrical connection	Connector, M12 × 1, 5-wire
Ambient temperature	-25...+50 °C
Storage temperature	-40...+80 °C
Pressure resistance	0.5...5 bar
Protection class	IP67
Switching state	LED, Yellow
Object detected	LED, Green

Important: The detection ranges for other targets may differ from those for standard targets due to the different reflection properties and geometries.

Sonic Cone

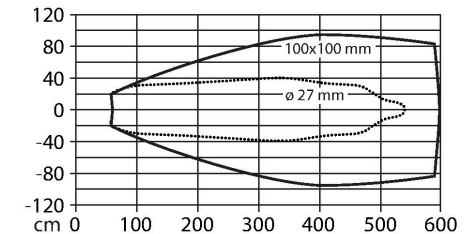


Technical data

Tests/approvals	
MTTF	193 years acc. to SN 29500 (Ed. 99) 40 °C
Declaration of conformity EN ISO/IEC	EN 60947-5-7
Vibration resistance	20 g, 10...55 Hz, sine, 3 axes, 30 min/axis according to IEC 60068-2-6
Shock test	30 g, 11 ms, half sine, 3 axes according to IEC 60068-2-27
Approvals	CE cULus

Mounting instructions

Mounting instructions/Description

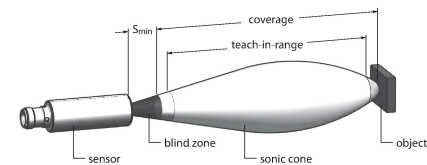

Select Teach Out1	GND/T1 > 2 s	LED  1x slow 1 Hz Start teaching Out1	LED  GN  YE  flashes alternating
Select Teach Out2	GND/T1 > 8 s	LED  2x slow 1 Hz Start teaching Out2	
GND/T1 > 2 s LED  1x slow 1 Hz Switching point: measure and save OK  5 Hz Fail  1.5 s GND/T1 > 8 s LED  2x slow 1 Hz Window function: measure and save SP1 Start choice window / hysteresis Fail  5 Hz 1.5 s			
GND/T1 > 2 s LED  1x slow 2 Hz Window function: measure and save SP2 OK  5 Hz Fail  1.5 s GND/T1 > 8 s LED  1x fast 8 Hz Select: window / hysteresis Window  5 Hz Hysteresis  1.5 s Fail  1.5 s UB / T2 > 2 s LED  1x fast 8 Hz Cancel Canceled  5 Hz 1.5 s			
GND/T1 > 14 s LED  3x slow 1 Hz Invert logic NC  5 Hz NO  1.5 s UB / T2 > 2 s LED  1x fast 8 Hz Cancel Canceled  5 Hz 1.5 s			
Out2: current output	UB / T2 > 2 s	LED  1x slow 1 Hz Out2: current output	OK  5 Hz 1.5 s
Out2: voltage output	UB / T2 > 8 s	LED  2x slow 1 Hz Out2: voltage output	OK  5 Hz 1.5 s
Out2: switch	UB / T2 > 14 s	LED  3x slow 1 Hz Out2: switch	OK  5 Hz 1.5 s
Retro-reflective sensor	UB / T2 > 20 s	LED  1x slow 1 Hz Out2: switch only – inverted Out1	OK  5 Hz Fail  1.5 s
Start factory reset	GND/T1 > 14 s	LEDs  slow 2 Hz Start factory reset	
GND/T1 > 2 s LED  1x fast 8 Hz Reset OK Reset  5 Hz 1.5 s UB / T2 > 2 s LED  1x fast 8 Hz Cancel Canceled  5 Hz 1.5 s			

Setting the limit values

The ultrasonic sensor can be parameterized in such a way that you can either set a teachable measuring and switching range via an analog and a switching output, or switching ranges via two switching outputs. These settings are done with the Easy-Teach adapter or with the buttons at the sensor. The green and yellow LEDs indicate whether the sensor has detected the object.

Various functions such as single switchpoint, window mode or reflection mode to a fixed target can be taught. Further information is described in the operating instructions. How to set the window mode by teaching two limits is described below. These two limits form the switching window and can be selected freely within the detection range.

Easy-Teach

- Connect the teach adapter TX1-Q20L60 between the sensor and connection cable
- Position object for the first limit value
- Press and hold the select button for output 1 or 2 for 2 or 8 s against Gnd
- Press and hold the select button for 8 s against Gnd to teach the first limit value
- Position object for the second limit value
- Press and hold button for at least 2 s against Gnd

Teach button

- Position object for the first limit value
- Press and hold button 1 to select output 1 or 2 for 2 or 8 s against Gnd
- Press and hold button 1 for at least 8 s
- Position object for the second limit value
- Press and hold button 1 for at least 2 s

LED response

Successful teaching is indicated by a fast flashing green LED. The sensor then automatically runs in normal operating mode. Unsuccessful teach-in is indicated by the LED flashing alternately green and yellow. In normal operating mode, both LEDs signal the switching state of output 1.

- Green: Object is within the detection range but not in the switching range
- Yellow: Object is within the switching range

MW30

6945005

Mounting bracket for threaded barrel sensors; material: Stainless steel A2 1.4301 (AISI 304)

Technical drawing of the MW30 mounting bracket. The drawing shows a side view of the bracket with the following dimensions in mm: 30,5 (top width), 19,1 (height of the top flange), 63,5 (total height), 23 (height of the base), 44,5 (width of the base), 10,3 (width of the mounting slot), 2,2 (thickness of the base), 57,2 (total width), 34,8 (width of the mounting slot), 11,2 (height of the mounting slot), 5,5 (height of the top flange), and 20,6 (width of the base).

Dimension drawing	Type	ID	
	RKC4.5T-2/TEL	6625016	Connection cable, M12 female connector, straight, 5-pin, cable length: 2 m, jacket material: PVC, black; cULus approval
	WKC4.5T-2/TEL	6625028	Connection cable, M12 female connector, angled, 5-pin, cable length: 2 m, jacket material: PVC, black; cULus approval

Dimension drawing	Type	ID	
	USB-2-IOL-0002	6825482	IO-Link Master with integrated USB port
	TX1-Q20L60	6967114	Teach adapter for inductive encoders, linear position, angle, ultrasonic and capacitive sensors
	BL67-4IOL	6827386	4-channel IO-Link Master module for the modular BL67 I/O-system
	BL20-E-4IOL	6827385	IO-Link master module for the modular BL20 I/O system, 4-channel
	TBEN-S2-4IOL	6814024	Compact multiprotocol I/O module, 4 IO-Link Master 1.1 Class A, 4 universal PNP digital channels 0.5 A