


QS186LE2Q8 Photoelectric Sensor – Laser Emitter



Technical data


| Туре | QS186LE2Q8 |
|------------------------------|-------------------------------|
| ID | 3074733 |
| Optical data | |
| Function | Opposed mode sensor |
| Operating mode | Laser Emitter |
| Light type | IR |
| Wavelength | 650 nm |
| Laser class | <u>A</u> 2 |
| Range | 015000 mm |
| Electrical data | |
| Operating voltage | 1030 VDC |
| Residual ripple | < 10 % U _{ss} |
| DC rated operational current | ≤ 100 mA |
| Short-circuit protection | yes |
| Reverse polarity protection | yes |
| Readiness delay | ≤ 0.01 s |
| Readiness delay | ≤ 10 ms |
| Mechanical data | |
| Design | Rectangular with thread, QS18 |
| Dimensions | Ø 18 x 31 x 15 x 35 mm |
| Housing material | Plastic, ABS |
| Lens | plastic, PMMA |
| Electrical connection | Connector, M12 × 1, PVC |
| Number of cores | 4 |
| Ambient temperature | -10+50 °C |
| Protection class | IP67 |
| Special features | Laser |
| | |

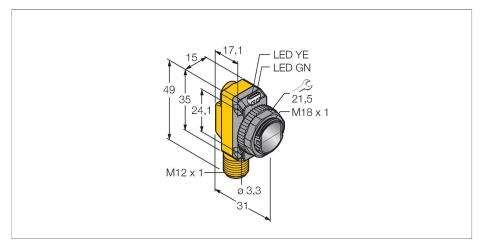


Features

- Male M12 × 1, 4-pin
 Protection class IP67
 LED all-round visible
 Male M12 × 1
- Laser class 2

Wiring diagram





Functional principle

Opposed mode sensors consist of an emitter and a receiver. They are installed opposite to each other whereby the emitted light aims directly at the receiver. When an object interrupts or weakens the light beam, the sensor switches. Opposed mode sensors are the most reliable photoelectric sensors for detection of opaque objects. The high light/dark contrast and the very high excess gain are typical for this function mode and enable operation over large distances and under difficult conditions.


Activation

By connecting the control input (PIN 2 WH) to ground (-) the laser beam is turned on. The laser beam is turned off again by feeding 10 ... 30 VDC to the control input or by nonconnecting the wire.

Technical data

| Power-on indication | LED, Green |
|------------------------|---|
| Excess gain indication | LED |
| Tests/approvals | |
| MTTF | 530 years acc. to SN 29500 (Ed. 99) 40 °C |
| Approvals | CE |

Excess gain curve Excess gain in relation to the distance (type 6EB/RB)



Accessories

SMB18A

Ø 18.5

Ø 4.6

R 24.2

Ø 4.6

A 46


3033200 Mounting bracket, rectangular, stainless steel, for sensors with 18 mm thread

SMB18AFAM10

3012558 Mounting bracket, material VA 1.4401, for M10 x 1.5 thread, thread length 18 mm

SMBQS18A 3069721

Mounting bracket, stainless steel, for 18 mm thread



Mounting bracket, PBT black, for sensors with 18 mm thread, rotatable

3052519

Accessories


24,9

21

M18 x 1

Dimension drawing Type ID

RKC4.4T-2/TEL 6625013



19,4

Connection cable, female M12, straight, 4-pin, cable length: 2 m, sheath material: PVC, black; cULus approval; other cable lengths and qualities available, see www.turck.com



Dimension drawing

Type

WKC4.4T-2/TEL

6625025

Connection cable, female M12, angled, 4-pin, cable length: 2 m, sheath material: PVC, black; cULus approval; other cable lengths and qualities available, see www.turck.com