


M18TUP8Q Temperature sensor – Infrared sensor

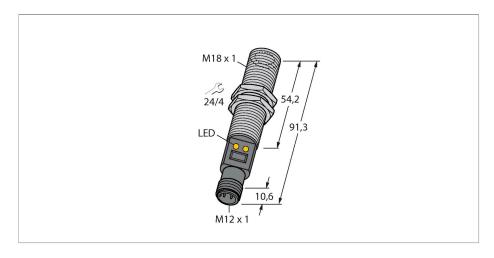


Technical data

Time	MAOTUDOO
Туре	M18TUP8Q
ID no.	3074916
Measuring range	0300 °C
Temperature operating range	-4158 °F
Factory setting	-20280 °C
	-4536 °F
Response time	75 ms
Operating voltage	1230 VDC
Short-circuit/reverse polarity protection	yes / Cyclic / yes
Protection type and class	IP67
Output 1	Analog output
Output 2	switching output
Output function	NO contact, PNP/Analog output
Voltage output	010 V
Response time typical	< 75 ms
Ambient temperature	-20+70 °C
Storage temperature	-20+70 °C
Housing	
Housing material	Stainless steel, 1.4301 (AISI 304), Grey
Process connection	M18 × 1
Electrical connection	Connectors, M12 × 1
Switching state	LED, Yellow
Included in delivery	2 M18 × 1 metal hexagon nuts

Features


- connection via M12 x 1 connector
- ■D:S ratio 8:1
- Operating voltage 12...30 VDC
- Measuring range adjustable via teach-in
- ■Analog output 0...10 V
- ■PNP Alarm output switches at 10 V
- ■Temperature range 0 ... +300 °C

Wiring diagram




Functional principle


Temperature sensors are used in applications where temperatures for control and optimisation of processes must be captured and monitored. The sensor operates only as a receiver. The thermal radiation of an object within a wave length range of 8 to 14 µm is transformed into an electrical signal via a thermopile and then further processed to become an output signal. Here the D:S (distance: spot) ratio is very important because it specifies the diameter of the spot at a defined distance. The sensor is optimally aligned, if the spot is completely covered by the object, whose temperature is to be monitored.



TURCK

Accessories

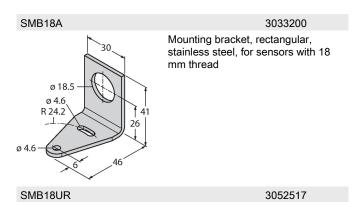



LAT1812

Mounting bracket, PBT black, for sensors with 18 mm thread, rotatable

3052519

3074262

Mounting bracket, for wall mounting, stainless steel 300, 2-piece, rotatable, 18 mm bore hole, srew set included Laser alignment aid, visible red, contains M12 laser emitter (laser class 2) and mounting bracket SMB1812, for sensors with 18 mm thread, 10 ... 30 VDC supply necessary

Accessories

