


# M18TIP14Q Temperature sensor – Infrared sensor

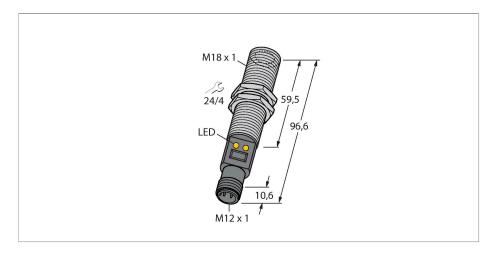


## Technical data

Туре	M18TIP14Q
ID no.	3076327
Measuring range	0300 °C
Temperature operating range	-4158 °F
Factory setting	-20280 °C
	-4536 °F
Response time	75 ms
Operating voltage	1230 VDC
Short-circuit/reverse polarity protection	yes / Cyclic / yes
Protection type and class	IP67
Output 1	Analog output
Output 2	switching output
Output function	NO contact, PNP/Analog output
Current output	420 mA
Response time typical	< 75 ms
Ambient temperature	-20+70 °C
Storage temperature	-20+70 °C
Housing	
Housing material	Stainless steel, 1.4301 (AISI 304), Grey
Process connection	M18 × 1
Electrical connection	Connectors, M12 × 1
Switching state	LED, Yellow
Included in delivery	2 M18 × 1 metal hexagon nuts

### **Features**


- connection via M12 x 1 connector
- ■D:S ratio 14:1
- ■Operating voltage 12...30 VDC
- Measuring range adjustable via teach-in
- ■Analog output 4..20 mA
- ■PNP Alarm output switches at 20 mA
- ■Temperature range 0 ... +300 °C

## Wiring diagram



## Functional principle


Temperature sensors are used in applications where temperatures for control and optimisation of processes must be captured and monitored. The sensor operates only as a receiver. The thermal radiation of an object within a wave length range of 8 to 14 µm is transformed into an electrical signal via a thermopile and then further processed to become an output signal. Here the D:S (distance: spot) ratio is very important because it specifies the diameter of the spot at a defined distance. The sensor is optimally aligned, if the spot is completely covered by the object, whose temperature is to be monitored.




## TURCK

3074262


## Accessories

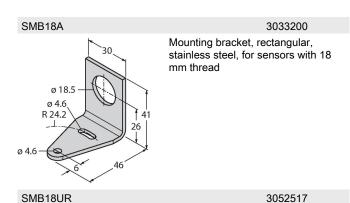

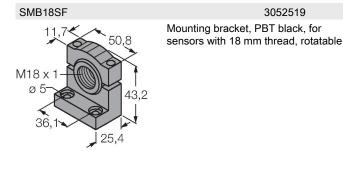

Mounting bracket, for wall mounting, stainless steel 300, 2-piece, rotatable, 18 mm bore hole, srew set included Laser alignment aid, visible red, contains M12 laser emitter (laser class 2) and mounting bracket SMB1812, for sensors with 18 mm thread, 10 ... 30 VDC supply necessary

#### Accessories

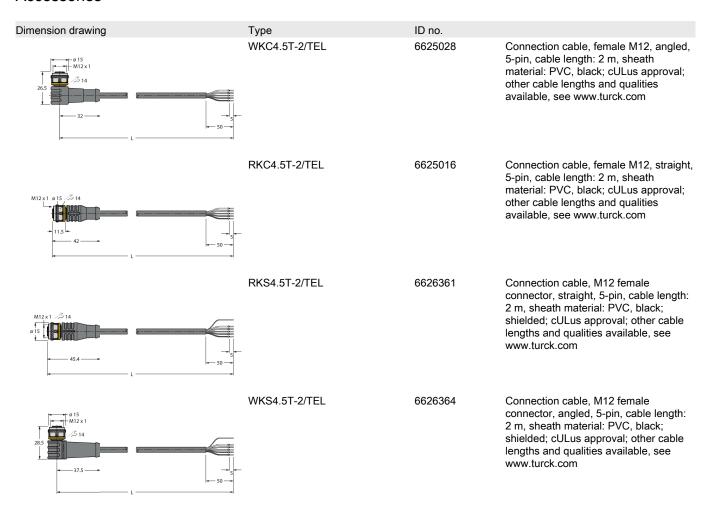

LAT1812