


# Modul de extensie piconet pentru IP-Link


## 8 ieșiri digitale 0.5 A

### SNNE-0008D-0006

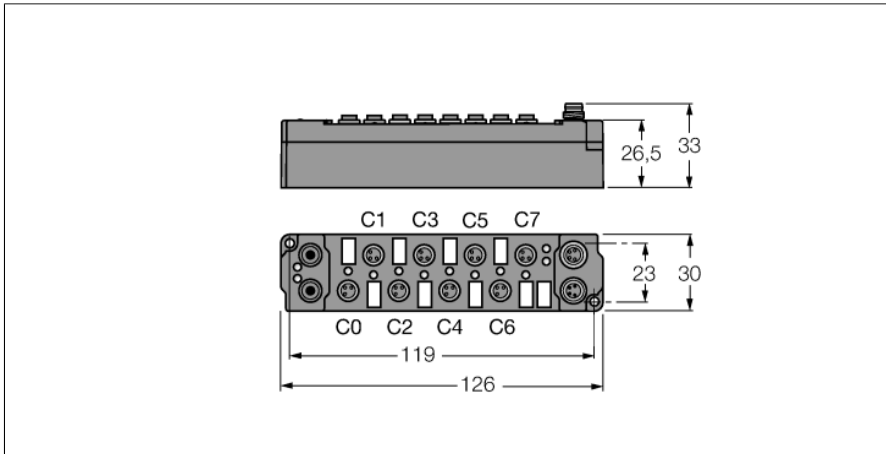


- Conexiune directă la IP link
- Carcasă armată cu fibră de sticlă
- Module încapsulate
- Conector metallic
- Grad de protecție IP67

#### M8 × 1 ieșire



#### M8 × 1 Alimentare



$$I_{Bmax} = I_{Lmax} = 4 \text{ A}$$

Tip	SNNE-0008D-0006
Nr. ID	6824185
Număr de canale	8
Tensiune de alimentare / tensiune de sarcină	20...29 Vcc
Curent de alimentare	≤ 25 mA
Lungime fibră optică	≤ 15 m
Număr de canale	8 ieșiri digitale conform EN 61131-2
Tensiune de ieșire	20...29 Vcc de la tensiunea de alimentare
Curent de ieșire pe canal	0.5 A, protejat la scurtcircuit
Tip de sarcină	rezistiv, inductiv, bec de sarcină
Frecvență de comutare	≤ 500 Hz
Simultaneity factor	1
Dimensiuni (l x L x h)	30 x 126 x 26.5 mm
Test vibrații	Conf. cu EN 60068-2-6
Test la șocuri mecanice	conform DIN EN 60068-2-27
Compatibilitate electromagnetică (interferențe)	Conf. cu EN 61000-6-2/EN 61000-6-4
Clasă de protecție	IP67
Certificări	CE, cULus

## Process image pentru date de intrare

		Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0	
PROFIBUS-DP coupling module: "Byte alignment" is disabled (default) and byte n has been used halfway. DeviceNet™, CANopen, INTERBUS, Ethernet coupling module: Byte n has been used halfway. Up to 8 bit user data are mapped.	Output	Byte n (M8)	C3P4	C2P4	C1P4	C0P4	is used by the physically preceding bit-oriented extension module connected via the IP Link.			
		Byte n (M12)	C1P2	C1P4	C0P2	C0P4				
		Byte n+1 (M8)	is used by the physically following bit-oriented extension module connected via the IP Link.				C7P4	C6P4	C5P4	C4P4
		Byte n+1 (M12)					C3P2	C3P4	C2P2	C2P4
PROFIBUS-DP coupling module: "Byte alignment" is disabled (default) and the previous byte has been completely used or "byte alignment" is active. DeviceNet™, CANopen, INTERBUS, Ethernet coupling module: The previous byte has been completely used. Up to 8 bit user data are mapped.	Output	Byte n (M8)	C7P4	C6P4	C5P4	C4P4	C3P4	C2P4	C1P4	C0P4
		Byte n (M12)	C3P2	C3P4	C2P2	C2P4	C1P2	C1P4	C0P2	C0P4
		C... = Connector no. – P... = Pin no.								