


## Compact Multiprotocol I/O Module for Ethernet

### 16 Universal Digital Channels, Configurable as PNP Inputs or 2 A Outputs

#### TBEN-L4-16DXP

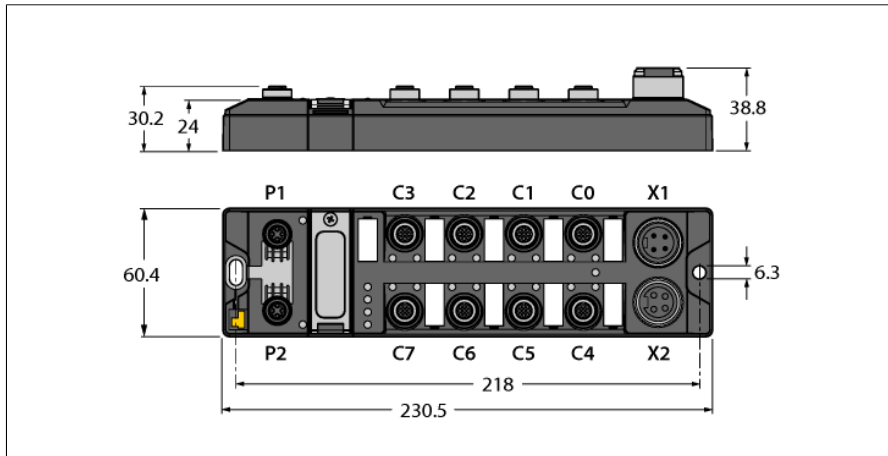

- PROFINET® device, EtherNet/IP™ device or Modbus® TCP slave
- Integrated Ethernet switch
- Supports 10 Mbps/100 Mbps
- 2x M12, 4-pin, D-coded, Ethernet fieldbus connection
- Glass fiber reinforced housing
- Shock and vibration tested
- Fully potted module electronics
- Protection classes IP65, IP67, IP69K
- 7/8" connector for power supply, 4-pin
- Separated power groups for safety shutdown
- Input diagnostics per port
- Max. 2 A per output
- Output diagnostics per channel
- Two freely selectable digital channels per port
- FLC/ARGEE programmable

|  |  |
|--|--|
| <b>Type designation</b>                  | TBEN-L4-16DXP  |
| Ident-No.                                | 6814012  |
| <b>Supply</b>                            |  |
| Supply voltage                           | 24 VDC   |
| Admissible range                         | 18...30 VDC  |
|  | Total current max. 9 A per voltage group                                   |
|  | Total current V1 + V2 max. 11 A  |
| Voltage supply connection                | 4-pin male 7/8" connector X1   |
| Sensor/Actuator supply V <sub>AUX1</sub> | supply of ports C0-C3 from V1  |
|  | short-circuit proof, 120 mA per port                                       |
| Sensor/Actuator supply V <sub>AUX2</sub> | supply of ports C4-C7 from V2  |
|  | short-circuit proof, 120 mA per port                                       |
| Electrical isolation                     | galvanic isolation of the voltage groups V1 and V2, voltages up to 500 VAC |
| <b>System data</b>                       |  |
| Fieldbus transmission rate               | 10 Mbps/100 Mbps   |
| Fieldbus connection technology           | 2 x M12, 4-pin, D-coded  |
| Protocol detection                       | automatic  |
| Web server                               | Default: 192.168.1.254   |
| Service interface                        | Ethernet via P1 or P2  |
| <b>Field Logic Controller (FLC)</b>      |  |
| ARGEE Firmware Version                   | 3.2.9.0  |
| ARGEE Engineering Version                | 2.0.24.0   |
| <b>Modbus TCP</b>                        |  |
| Addressing                               | Static IP, DHCP  |
| Supported function codes                 | FC1, FC2, FC3, FC4, FC5, FC6, FC15, FC16, FC23                             |
| Number of TCP connections                | 8  |
| Input register start address             | 0 (0x0000 hex)   |
| Output register start address            | 2048 (0x0800 hex)  |
| <b>EtherNet/IP™</b>                      |  |
| Addressing                               | acc. to EtherNet/IP™ specification   |
| Quick Connect (QC)                       | < 150 ms   |
| Device Level Ring (DLR)                  | supported  |
| Class 3 connections (TCP)                | 3  |
| Class 1 connections (CIP)                | 10   |
| Input Assembly Instance                  | 101  |
| Output Assembly Instance                 | 102  |
| Configuration Assembly Instance          | 106  |

# Compact Multiprotocol I/O Module for Ethernet

## 16 Universal Digital Channels, Configurable as PNP Inputs or 2 A Outputs

### TBEN-L4-16DXP

---

#### PROFINET

|                                 |                                 |
|---------------------------------|---------------------------------|
| Addressing                      | DCP                             |
| Conformance class               | B (RT)                          |
| MinCycleTime                    | 1 ms                            |
| Fast Start-Up (FSU)             | < 150 ms                        |
| Diagnostics                     | acc. to PROFINET alarm handling |
| Topology detection              | supported                       |
| Automatic addressing            | supported                       |
| Media Redundancy Protocol (MRP) | supported                       |

---

#### Digital inputs

|                           |   |
|---------------------------|---|
| Number of channels        | 16  |
| Connectivity inputs       | M12, 5-pin  |
| Input type                | PNP   |
| Type of input diagnostics | Group diagnostics   |
| Switching threshold       | EN 61131-2 Typ 3, PNP   |
| Low level signal voltage  | < 5 V   |
| High level signal voltage | > 11 V  |
| Low level signal current  | < 1.5 mA  |
| High level signal current | > 2 mA  |
| Input delay               | 2.5 ms  |
| Electrical isolation      | Galvanically isolated to the fieldbus<br>Voltage proof up 500 VDC |

---

#### Digital outputs

|                            |   |
|----------------------------|---|
| Number of channels         | 16  |
| Connectivity outputs       | M12, 5-pol  |
| Output type                | PNP   |
| Type of output diagnostics | Channel diagnostics   |
| Output voltage             | 24 VDC from potential group                                       |
| Output current per channel | 2.0 A, short-circuit proof, max. 2.0 A per port                   |
| Output delay               | 1.3 ms  |
| Load type                  | EN 60947-5-1: DC-13   |
| Short-circuit protection   | yes   |
| Electrical isolation       | Galvanically isolated to the fieldbus<br>Voltage proof up 500 VDC |

---

#### Standard/Directive conformity

|                               |  |
|-------------------------------|--|
| Vibration test                | acceleration to 20 g<br>acc. to EN 60068-2-6   |
| Shock test                    | acc. to EN 60068-2-27  |
| Drop and topple               | acc. to EN 60068-2-31/IEC 60068-2-32   |
| Electromagnetic compatibility | acc. to EN 61131-2   |
| Approvals and certificates    | CE,<br>FCC,<br>FM Class I, Zone 2,<br>UV-resistant in accordance with DIN EN ISO<br>4892-2A (2013) |
| UL Certificate                | cULus LISTED 21 W2, Encl.type 1 IND.CONT.EQ.   |

---

#### General Information

|                        |   |
|------------------------|---|
| Dimensions (W x L x H) | 60.4 x 230.4 x 39mm                       |
| Operating temperature  | -40...+70 °C                              |
| Storage temperature    | -40 °C ... +85 °C                         |
| Altitude               | max. 5000 m                               |
| Protection class       | IP65<br>IP67<br>IP69K                     |
| MTTF                   | 148 years acc. to SN 29500 (Ed. 99) 20 °C |
| Housing material       | PA6-GF30                                  |
| Housing color          | Black                                     |
| Window material        | Lexan                                     |
| Material screw         | 303 stainless steel                       |
| Material label         | Polycarbonate                             |
| Halogen-free           | yes                                       |
| Mounting               | 2 mounting holes □ 6.3 mm                 |

## Compact Multiprotocol I/O Module for Ethernet


### 16 Universal Digital Channels, Configurable as PNP Inputs or 2 A Outputs

#### TBEN-L4-16DXP

---




Note the numbering of the IO range:  
From firmware version 3.2.9.0 and higher, ports C0 to C7 and channels CH0 to CH7 are counted. For more details on the corresponding change see manual.

**Compact Multiprotocol I/O Module for Ethernet**  
**16 Universal Digital Channels, Configurable as PNP Inputs or 2 A Outputs**  
**TBEN-L4-16DXP**







**Accessories**  
Ethernet cable (example):  
RSSD RSSD 441-2M  
Ident no. U-02482

M12 x 1 Ethernet




**Accessories**  
Accessories:  
Connection cable , 2-channel (example):  
RK 4.4T-2-RS 4.4T  
Ident no. U2445  
Splitter, 1-channel (example):  
YB2-FSM 4.5-2FKM 4.5  
Ident no. U0875-78

M12 x 1 I/O Port



**Accessories**  
Power supply cable (example):  
RSM RKM 40-2M  
Ident no. U2280-0

7/8" Power Supply

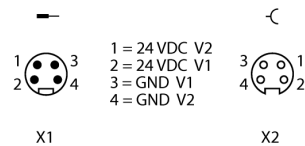

## Compact Multiprotocol I/O Module for Ethernet

### 16 Universal Digital Channels, Configurable as PNP Inputs or 2 A Outputs

#### TBEN-L4-16DXP

#### Module Status LED

| LED         | Color  | Status            | Description  |
|-------------|--|-------------------|--|
| ETH1 / ETH2 | Green  | On                | Ethernet Link (100 Mbps)   |
|             |  | Flashing          | Ethernet communication (100 Mbps)  |
|             | yellow   | On                | Ethernet link (10 Mbps)  |
|             |  | Flashing          | Ethernet communication (10 Mbps)   |
|             |  | Off               | No Ethernet link   |
| BUS         | Green  | On                | Active connection to a master  |
|             |  | Flashing          | Steady flashing: Ready<br>Sequence of 3 flashes in 2 seconds: FLC/ARGEE active |
|             |  |                   |  |
|             | Red  | On                | IP-address conflict or Restore Mode or Modbus timeout                          |
|             |  | Flashing          | Blink/Wink command active  |
|             | Green/Red  | Alternating       | Autonegotiation and/or waiting for DHCP/Boot-P addressing                      |
|             | Off  | Power off         |  |
| ERR         | Green  | On                | Diagnostics disabled   |
|             | Red  | On                | Diagnostics enabled<br>$V_2$ undervoltage diagnosis is parameter-dependent     |
|             | LED response master in the Beep network:                     |                   |  |
|             | Green  | 1 Hz, 250 ms off  | Cyclical IO data exchange  |
|             | Red/Green  | 1 Hz, 250 ms red  | Cyclical IO data exchange, diagnostics available                               |
|             | Green/Red  | 1 Hz, alternating | Discovery mode active  |
|             | Red  |                   | Discovery mode active, diagnostics available                                   |
| PWR         | LED response parameter (PWR) at $V_2$ Undervoltage = "red"   |                   |  |
|             | Green  | ON                | $V_1$ and $V_2$ power on   |
|             | Red  | ON                | $V_2$ power off or below defined tolerance of 18 V                             |
|             |  | OFF               | $V_1$ power off or below defined tolerance of 18 V                             |
|             | LED response parameter (PWR) at $V_2$ Undervoltage = "green" |                   |  |
|             | Green  | ON                | $V_1$ and $V_2$ power on   |
|             |  | Flashing          | $V_2$ power off or below defined tolerance of 18 V                             |
|             |  | OFF               | $V_1$ power off or below defined tolerance of 18 V                             |

#### LED Status I/O

| LED          | Color | Status   | Description  |
|--------------|-------|----------|--|
| LED 0 ... 15 | Green | ON       | Input or output active   |
|              | Red   | ON       | Output active with overload/short circuit                              |
|              |       | flashing | Power overload at the corresponding port. Both port LEDs are flashing. |
|              |       | OFF      | Input or output inactive   |

# Compact Multiprotocol I/O Module for Ethernet

## 16 Universal Digital Channels, Configurable as PNP Inputs or 2 A Outputs

### TBEN-L4-16DXP

#### Process Data Mapping of the Single Protocols

For more details on the corresponding protocols see manual.

#### Modbus TCP Register Mapping

|               | Reg    | Bit 15       | Bit 14       | Bit 13       | Bit 12       | Bit 11       | Bit 10       | Bit 9       | Bit 8       | Bit 7       | Bit 6       | Bit 5       | Bit 4       | Bit 3       | Bit 2       | Bit 1       | Bit 0        |
|---------------|--------|--------------|--------------|--------------|--------------|--------------|--------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|--------------|
| Inputs (RO)   | 0x0000 | DI15<br>C7P2 | DI14<br>C7P4 | DI13<br>C6P2 | DI12<br>C6P4 | DI11<br>C5P2 | DI10<br>C5P4 | DI9<br>C4P2 | DI8<br>C4P4 | DI7<br>C3P2 | DI6<br>C3P4 | DI5<br>C2P2 | DI4<br>C2P4 | DI3<br>C1P2 | DI2<br>C1P4 | DI1<br>C0P2 | DI0<br>C0P4  |
| Status (RO)   | 0x0001 | -            | FCE          | -            | -            | CFG          | COM          | V1          | -           | V2          | -           | -           | -           | -           | -           | -           | Diag<br>Warn |
| Diag (RO)     | 0x0002 | -            | -            | -            | -            | -            | -            | -           | -           | -           | -           | -           | -           | -           | -           | -           | I/O<br>Diag  |
| Outputs (RW)  | 0x0800 | DO15<br>C7P2 | DO14<br>C7P4 | DO13<br>C6P2 | DO12<br>C6P4 | DO11<br>C5P2 | DO10<br>C5P4 | DO9<br>C4P2 | DO8<br>C4P4 | DO7<br>C3P2 | DO6<br>C3P4 | DO5<br>C2P2 | DO4<br>C2P4 | DO3<br>C1P2 | DO2<br>C1P4 | DO1<br>C0P2 | DO0<br>C0P4  |
| I/O Diag (RO) | 0xA000 | SCO7         | SCO6         | SCO5         | SCO4         | SCO3         | SCO2         | SCO1        | SCO0        | SCS7        | SCS6        | SCS5        | SCS4        | SCS3        | SCS2        | SCS1        | SCS0         |
| I/O Diag (RO) | 0xA001 | -            | -            | -            | -            | -            | -            | -           | -           | SCO15       | SCO14       | SCO13       | SCO12       | SCO11       | SCO10       | SCO9        | SCO8         |

#### EtherNet/IP™ data mapping with activated scheduled diagnostics, default settings

|                                  | Word | Bit 15       | Bit 14       | Bit 13        | Bit 12       | Bit 11       | Bit 10       | Bit 9       | Bit 8       | Bit 7       | Bit 6       | Bit 5       | Bit 4       | Bit 3       | Bit 2       | Bit 1       | Bit 0        |
|----------------------------------|------|--------------|--------------|---------------|--------------|--------------|--------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|--------------|
| Input data (station -> scanner)  |      |              |              |               |              |              |              |             |             |             |             |             |             |             |             |             |              |
| GW status                        | 0    | -            | FCE          | -             | -            | CFG          | COM          | V1          | -           | V2          | -           | -           | -           | -           | -           | -           | Diag<br>Warn |
| Inputs                           | 1    | DI15<br>C7P2 | DI14<br>C7P4 | DI13<br>C6P2  | DI12<br>C6P4 | DI11<br>C5P2 | DI10<br>C5P4 | DI9<br>C4P2 | DI8<br>C4P4 | DI7<br>C3P2 | DI6<br>C3P4 | DI5<br>C2P2 | DI4<br>C2P4 | DI3<br>C1P2 | DI2<br>C1P4 | DI1<br>C0P2 | DI0<br>C0P4  |
| Diag 1                           | 2    | -            | -            | Sched<br>Diag | -            | -            | -            | -           | -           | -           | -           | -           | -           | -           | -           | -           | I/O<br>Diag  |
| Diag 2                           | 3    | SCO7         | SCO6         | SCO5          | SCO4         | SCO3         | SCO2         | SCO1        | SCO0        | SCS7        | SCS6        | SCS5        | SCS4        | SCS3        | SCS2        | SCS1        | SCS0         |
| Diag 3                           | 4    | -            | -            | -             | -            | -            | -            | -           | -           | SCO15       | SCO14       | SCO13       | SCO12       | SCO11       | SCO10       | SCO9        | SCO8         |
| Output data (scanner -> station) |      |              |              |               |              |              |              |             |             |             |             |             |             |             |             |             |              |
| Control                          | 0    | reserved     |              |               |              |              |              |             |             |             |             |             |             |             |             |             |              |
| Outputs                          | 1    | DO15<br>C7P2 | DO14<br>C7P4 | DO13<br>C6P2  | DO12<br>C6P4 | DO11<br>C5P2 | DO10<br>C5P4 | DO9<br>C4P2 | DO8<br>C4P4 | DO7<br>C3P2 | DO6<br>C3P4 | DO5<br>C2P2 | DO4<br>C2P4 | DO3<br>C1P2 | DO2<br>C1P4 | DO1<br>C0P2 | DO0<br>C0P4  |

#### EtherNet/IP™ data mapping with activated summarized diagnostics

|                                  | Word | Bit 15       | Bit 14       | Bit 13       | Bit 12       | Bit 11       | Bit 10       | Bit 9       | Bit 8       | Bit 7       | Bit 6       | Bit 5       | Bit 4       | Bit 3       | Bit 2       | Bit 1       | Bit 0        |
|----------------------------------|------|--------------|--------------|--------------|--------------|--------------|--------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|--------------|
| Input data (station -> scanner)  |      |              |              |              |              |              |              |             |             |             |             |             |             |             |             |             |              |
| GW status                        | 0    | -            | FCE          | -            | -            | CFG          | COM          | V1          | -           | V2          | -           | -           | -           | -           | -           | -           | Diag<br>Warn |
| Inputs                           | 1    | DI15<br>C7P2 | DI14<br>C7P4 | DI13<br>C6P2 | DI12<br>C6P4 | DI11<br>C5P2 | DI10<br>C5P4 | DI9<br>C4P2 | DI8<br>C4P4 | DI7<br>C3P2 | DI6<br>C3P4 | DI5<br>C2P2 | DI4<br>C2P4 | DI3<br>C1P2 | DI2<br>C1P4 | DI1<br>C0P2 | DI0<br>C0P4  |
| Diag 1                           | 2    |              |              |              |              |              |              |             |             |             |             |             |             |             |             |             | I/O<br>Diag  |
| Output data (scanner -> station) |      |              |              |              |              |              |              |             |             |             |             |             |             |             |             |             |              |
| Control                          | 0    | reserved     |              |              |              |              |              |             |             |             |             |             |             |             |             |             |              |
| Outputs                          | 1    | DO15<br>C7P2 | DO14<br>C7P4 | DO13<br>C6P2 | DO12<br>C6P4 | DO11<br>C5P2 | DO10<br>C5P4 | DO9<br>C4P2 | DO8<br>C4P4 | DO7<br>C3P2 | DO6<br>C3P4 | DO5<br>C2P2 | DO4<br>C2P4 | DO3<br>C1P2 | DO2<br>C1P4 | DO1<br>C0P2 | DO0<br>C0P4  |

#### PROFINET process data

|         | Byte | Bit 7        | Bit 6        | Bit 5        | Bit 4        | Bit 3        | Bit 2        | Bit 1        | Bit 0       |
|---------|------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|-------------|
| Inputs  | 0    | DI8<br>C4P2  | DI7<br>C4P4  | DI6<br>C3P2  | DI5<br>C3P4  | DI4<br>C2P2  | DI3<br>C2P4  | DI2<br>C1P2  | DI1<br>C1P4 |
|         | 1    | DI16<br>C8P2 | DI15<br>C8P4 | DI14<br>C7P2 | DI13<br>C7P4 | DI12<br>C6P2 | DI11<br>C6P4 | DI10<br>C5P2 | DI9<br>C5P4 |
| Outputs | 0    | DO8<br>C4P2  | DO7<br>C4P4  | DO6<br>C3P2  | DO5<br>C3P4  | DO4<br>C2P2  | DO3<br>C2P4  | DO2<br>C1P2  | DO1<br>C1P4 |
|         | 1    | DO16<br>C8P2 | DO15<br>C8P4 | DO14<br>C7P2 | DO13<br>C7P4 | DO12<br>C6P2 | DO11<br>C6P4 | DO10<br>C5P2 | DO9<br>C5P4 |

Key:

|          |                                  |           |   |
|----------|----------------------------------|-----------|---|
| DIx      | Digital input channel x          | CFG       | I/O Configuration error                                 |
| DOx      | Digital output channel x         | FCE       | I/O-ASSISTANT Force Mode active                         |
| Cx       | Port x                           | I/O Diag  | I/O diagnostics connected                               |
| Px       | Pin x                            | SchedDiag | Manufacturer-specific diagnostics configured and active |
| DiagWarn | Diagnostic at least on 1 channel | SCSx      | Short-circuit at port x                                 |
| V1       | Undervoltage V1                  | SCG1      | Short-circuit supply ports C0-C3                        |

## Compact Multiprotocol I/O Module for Ethernet

### 16 Universal Digital Channels, Configurable as PNP Inputs or 2 A Outputs

#### TBEN-L4-16DXP

|     |  |      |                                  |
|-----|--|------|----------------------------------|
| V2  | Undervoltage V2                            | SCG2 | Short-circuit supply ports C4-C7 |
| COM | Communication error on internal module bus | SCOx | Short-circuit output channel x   |