



LED Signal Light Tower Light CL50GYRALS4PQP

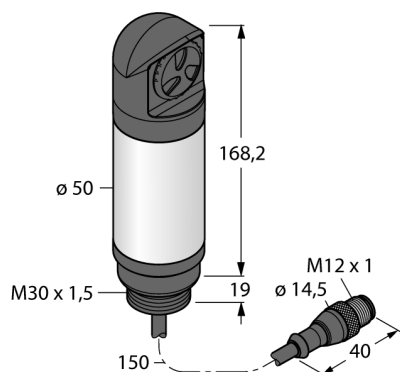

- LED tower light with beeper
- Individually controllable
- Mechanical screw-in thread M30 x 1.5
- Protection class IP67
- Cable with male end M12 x 1
- Operating voltage 10...30 VDC
- Beeper: Sealed, stakkato max. 94 dB

Wiring Diagram

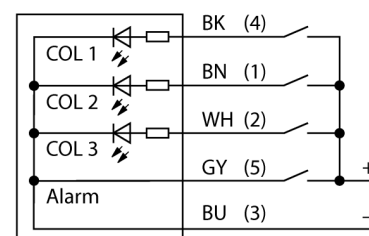

General description

Multicolor multifunction acoustic signaller
Rugged and well-priced LED tower, easy to install

Illuminated segments for clear operator guidance and display of system status.

Display of up to 3 colors.

Compact devices, no controller required

No mounting

The wiring diagram shows the PNP input configuration. An instruction leaflet with detailed information about the connection is included with the devices.

Type	CL50GYRALS4PQP
ID	3086600
Purpose	LED indicator light
Function	Tower light
Light type	Green Yellow Red
Dimmable	No
Features of color 1	Green, Permanently on, 72 lm
Features of color 2	Yellow, Permanently on, 30 lm
Features of color 3	Red, Permanently on, 38 lm
Acoustic signal	Staccato, 94dB
Electrical data	
Operating voltage U_n	18...30 VDC
Max. current consumption per color	100 mA
Max. current consumption of beeper	35 mA
Input type	PNP
Response time typical	< 10 ms
Mechanical data	
Cascadable	No
Design	Smooth barrel, CL50
Dimensions	Ø 50 x 168.2 mm
Housing material	Plastic, ABS/Polycarbonate, Black
Window material	Polycarbonate, diffuse
Electrical connection	Cable with connector, M12 x 1, 0.15 m, PVC
Number of cores	5
Ambient temperature	-20...+50 °C
Relative humidity	0...95%
Protection class	IP67
Tests/approvals	
Approvals	CE, UL listed