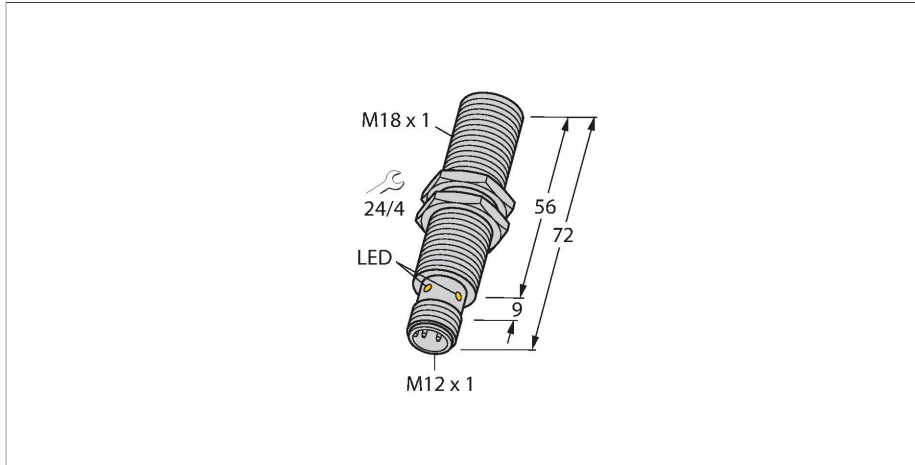


# TB-M18-H1147/C53

## HF Read/Write Head – For Bus Line Topology with TBEN-\*



### Technical data

Type	TB-M18-H1147/C53
ID	7030729
Approvals	CE UKCA UL
Radio approvals	EU/RED: Europe UK SI 2017/1206: United Kingdom FCC: USA IC: Canada MIC: Japan
<b>Electrical data</b>	
Operating voltage	10...30 VDC
DC rated operational current	≤ 80 mA
inrush current	700 mA For: 1 ms
Data transfer	Inductive coupling
Technology	HF RFID
Operating frequency	13.56 MHz
Radio communication and protocol standards	ISO 15693 NFC Typ 5
Read/Write distance max.	30 mm
Output function	4-wire, Read/Write
Suitable for bus mode to TBEN-*	Yes
<b>Mechanical data</b>	
Mounting conditions	Flush
Ambient temperature	-25...+70 °C
Design	Threaded barrel, M18 x 1
Dimensions	72 mm
Housing diameter	Ø 18 mm
Housing material	Metal, CuZn, Chrome-plated
Active area material	Plastic, PA12-GF30

### Features

- Threaded barrel, M18 x 1
- Chrome-plated brass
- Device without end termination
- Device may only be operated in line topology TBEN-S\*-2RFID-\* or TBEN-L\*-4RFID-\*
- Max. 32 nodes per line or connection permitted
- Use a corresponding terminating resistor (see accessories)
- Observe the performance of the power supply, especially when turned on, and the maximum current carrying capacity of the cables
- Observe the voltage drop on the line
- The maximum possible length of the spur line is 2 m
- The maximum possible length of the bus is 50 m
- By default, a command can only be processed by one read/write head, making HF bus mode suitable for static applications and slow dynamic applications
- In continuous HF bus mode, a command is executed simultaneously on all read/write heads in a bus topology. The recorded data is stored in the ring buffer of the module
- The read/write head is automatically assigned an address
- For different application requirements, the address and can be parameterized
- Powered and operated only via connection to BL ident interface module
- M12 × 1 connector, connection only via BL ident extension cable


### .../S2503 Connectors




### .../S2500 Connectors

## Technical data

Vibration resistance	55 Hz (1 mm)
Shock resistance	30 g (11 ms)
Protection class	IP67
Electrical connection	M12 × 1
MTTF	391 years acc. to SN 29500 (Ed. 99) 20 °C
Power-on indication	LED, Green
Packaging unit	1



## .../S2501 Connectors



## Functional principle

The HF read/write devices operating at a frequency of 13.56 MHz form a transmission zone, the size of which (0...500 mm) varies depending on the combination of read/write device and tag used.


The read/write distances mentioned here only represent standard values measured under laboratory conditions, free from any influences caused by surrounding materials.

The read/write distances of the tags for mounting in metal TW-R\*\*-(MF) were determined in metal.

Attainable distances may vary by up to 30 % due to component tolerances, mounting conditions, ambient conditions and material qualities (especially when mounted in metal).

Testing of the application under real operating conditions is therefore essential, especially with on-the-fly reading and writing!

## Mounting instructions/Description























Diameter active area B Ø 18 mm



flush mounting

LED	Color	Status	Meaning
1	OFF	OFF	Operating voltage switched off
	GREEN	ON	Operating voltage switched on
	GREEN	FLASHING (1 Hz)	HF field switched off
	GREEN	FLASHING (2 Hz)	Tag in detection range

Dimensions	Type designation	Read-write distance		Transfer zone		Minimum distance between two read-write heads [mm]
		Recommended (mm)	max. [mm]	length max. [mm]	width offset max. [mm]	
	Ident - no.					

	<b>TW-R7.5-B128</b> 7030231	8	14	16	8	54
	<b>TW-R9.5-B128</b> 7030252	9	15	18	9	54
	<b>TW-R9.5-K2</b> 7030558	5	13	12	6	54
	<b>TW-R16-B128</b> 6900501	10	17	14	7	54
	<b>TW-R20-B128</b> 6900502	8	15	12	6	54
	<b>TW-R20-B320</b> 100005244	8	15	12	6	54
	<b>TW-R20-K2</b> 6900505	5	12	16	8	54
	<b>TW-R30-B128</b> 6900503	8	17	22	11	54
	<b>TW-R30-B320</b> 100005245	8	17	22	11	54
	<b>TW-R30-K2</b> 6900506	6	14	18	9	54


	<b>TW-BD10x1.5-19-K2</b> 6901381	6	14	16	8	54
	<b>TW-R30-M-B128</b> 7030210	8	12	16	8	54
	<b>TW-R50-M-B128</b> 7030209	8	18	22	11	54
	<b>TW-R30-M-K2</b> 7030206	7	10	18	9	54
	<b>TW-R50-M-K2</b> 7030229	7	15	24	12	54
	<b>TW-R4-22-B128</b> 7030237	3	9	12	6	54
	<b>TW-L86-54-C-B128</b> 6900479	10	21	70	35	54
	<b>TW-R10-M-B146</b> 7030545	5	7	7	3	54
	<b>TW-R10-M-K2</b> 100002368	5	7	7	3	54
	<b>TW-R12-M-B146</b> 7030500	5	7	7	3	54

	<b>TW-L18-18-F-B128</b> 7030634	8	16	16	8	54
	<b>TW-B58x1.25-19-K2</b> 7030638	5	10	13	6	54

## Accessories


**BSN 18** 69472

Mounting clamp for threaded barrel sensors; material: PA66-GF




**BST-18N** 6947215

Mounting clamp for threaded barrel sensors, without dead-stop; material: PA6




**QM-18** 6945102

Quick-mount bracket with dead-stop; material: Chrome-plated brass. Male thread M24 x 1.5. Note: The switching distance of the proximity switches may change when using quick-mount brackets.




**BST-18B** 6947214

Mounting clamp for threaded barrel sensors, with dead-stop; material: PA6




**BSS-18** 6901320

Mounting clamp for smooth and threaded barrel sensors; material: Polypropylene




**BSS-SPV2** 6901316

Weld-on plate for BSS mounting brackets




**BSS-TSM 2 pcs** 6901323

DIN rail nut for BSS and BSM mounting clips, for mounting on DIN rails







**MW-18** 6945004

Mounting bracket for threaded barrel sensors; material: Stainless steel A2 1.4301 (AISI 304)



## Accessories

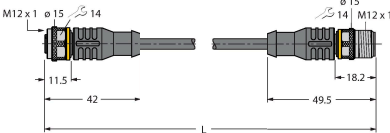Dimension drawing	Type	ID	
	RSE57-TR2/RFID	6934908	Terminating resistor to build an RFID line topology
	VT2-FKM5-FKM5-FSM5	6930573	T-splitter to build an RFID line topology
	VB2-FKM5-FSM5.205-FSM5.305/S2550	6936821	Y-splitter for re-powering a supply voltage for the RFID bus topology
	RK4.5T-2-RS4.5T/S2503	7030331	BL ident cable, M12 female connector, straight to M12 male connector, cable length: 2 m, jacket material: PUR, black; other cable lengths and qualities available, see <a href="http://www.turck.com">www.turck.com</a>