


Accessories Compression Fitting For Temperature Sensors CF-M-6-N1/2-A4

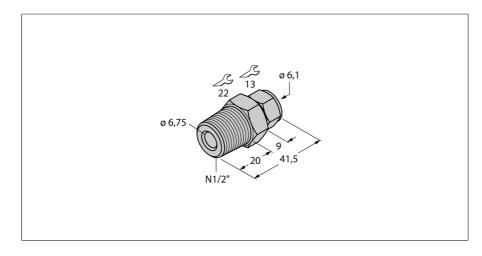

- Compression fittings for direct mounting of TP temperature probes
- Metal compression fitting
- For probe with 6 mm diameter
- Process connection 1/2" NPT male thread

General description

With compression fittings, probes can be mounted directly where they are needed and they can be immersed as deep as wanted. Through direct contact with the medium, they react immediately to temperature changes.

Туре	CF-M-6-N1/2-A4
ID	9910529
Temperature range	
Measuring range	-50350 °C
	-58662 °F
Mechanical data	
Housing material	Stainless steel, 1.4404 (AISI 316L)
Sealing material	stainless steel
Internal diameter	7 mm
Process connection	1/2" NPT male thread
Pressure resistance	100 bar
Max. tightening torque of housing nut	100 Nm



Type code	Ident no.		Dimension drawing
TTMS-206A-CF-LI-	9910660	stainless steel transmitter with integrated probe	
UPN-H1140-L100			0 16 M12 x 1
TTMS-206A-CF-LI- UPN-H1140-L100/S713	9910661	stainless steel transmitter with integrated probe	o 16 M12 x 1
			58.5
TTMS-206A-CF-LI- UPN-H1140-L150	9910662	stainless steel transmitter with integrated probe	
UPN-H1140-L150			0 16 M12 x 1
TTMS-206A-CF-LI- UPN-H1140-L150/S713	9910663	stainless steel transmitter with integrated probe	o 16 M12 x 1
TTMS-206A-CF-LI6-	100004227	stainless steel transmitter with integrated probe	
H1140-L100-50/150			M12 x 1 0 16 58.5
TTMS-206A-CF-LI6- H1140-L200-50/150	100004734	stainless steel transmitter with integrated probe	o 16 M12 x 1



Type code	Ident no.		Dimension drawing
TTMS-206A-CF-LI6- H1140-L150-50/150	100004735	stainless steel transmitter with integrated probe	
111140-2130-30/130			o 16 M12 x 1
TTMS-206A-CF-LI- UPN-H1140-L050	100006167	stainless steel transmitter with integrated probe	M12 x 1
			58,5
TTMS-206A-CF-LI- UPN-H1140-L075	100022284	stainless steel transmitter with integrated probe	
			016 M12x1
TTMS-206A-CF-LI6- H1140-L050-50/150	100025946	stainless steel transmitter with integrated probe	M12 x 1 0 16
			58,5
TTMS-206A-CF-LI6- H1140-L50-50/150	100004227_1	USSAInless steel transmitter with integrated probe	M12x1
			58.5
TTMS-206A-CF-LI- UPN-H1140-L300	100046031	stainless steel transmitter with integrated probe	o 16
			58,5



Type code	Ident no.		Dimension drawing
TTMS-206A-CF-	100047517	stainless steel transmitter with integrated probe	
LIUPN-H1140- L050-25/100°C			0 16 M12 x 1
TTMS-206A-CF-LI- UPN-H1140-L600	100049953	stainless steel transmitter with integrated probe	o 16 M12 x 1
TTMS-206A-CF-LI6- H1140-L100-0/100	100050213	stainless steel transmitter with integrated probe	0 16 M12 x 1
TTMS-206A-CF-LI6- H1140-L600-0/100	100050214	stainless steel transmitter with integrated probe	58,5 M12 x 1 0 16 58,5
TTMS-206B-CF-LI6- H1140-L400-0/500	100050472	stainless steel transmitter with integrated probe	0 16 M12 x 1
TTMS-206A-CF-LI6- H1140-L100-20/80	100050799	stainless steel transmitter with integrated probe	0 6 M12 x 1



Type code	Ident no.		Dimension drawing
TTMS-206A-CF-LI6- H1140-L600-20/80	100050800	stainless steel transmitter with integrated probe	o 16 M12×1
TTMS-206A-CF-LI6- H1140-L150-0/150	100051610	stainless steel transmitter with integrated probe	0 16 M12 x 1