


# RM-29S10C-9A28B-R3M12

## Absolute Rotary Encoder - Multiturn Industrial Line

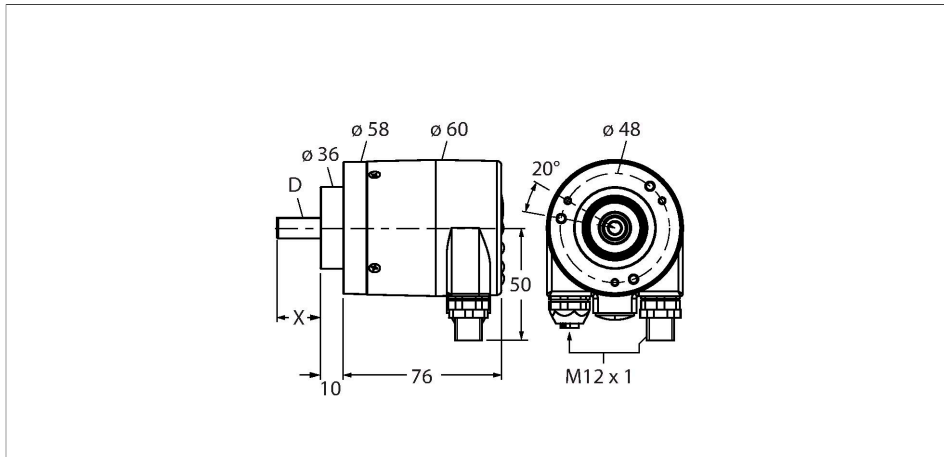


### Features

- Clamping flange, Ø 58 mm
- Solid shaft, Ø 10 mm × 20 mm
- Optical measuring principle
- Shaft material: stainless steel
- Protection class IP67 on shaft side
- -40...+80 °C
- Max. 3000 rpm
- Profibus
- Removable bus cover with male, 3 × M12
- Singleturn, resolution scalable to 16 bit (default 13-bit)
- Multiturn resolution max. 12 bit, scalable

### Technical data

Type	RM-29S10C-9A28B-R3M12
Ident. no.	1544416
Measuring principle	Optical
Max. Rotational Speed	3000 rpm
Moment of inertia of the rotor	4 x10 <sup>-6</sup> kgm <sup>2</sup>
Starting torque	< 0.01 Nm
Ambient temperature	-40...+80 °C
Operating voltage	10...30 VDC
No-load current	≤ 120 mA
Wire breakage/Reverse polarity protection	yes
Output type	Absolute multiturn
Resolution singleturn	16 Bit
Resolution multiturn	12 Bit
	single-turn scalable
Communication protocol	PROFIBUS-DP
Design	Solid shaft
Flange type	Clamping flange
Flange diameter	Ø 58 mm
Shaft Type	Solid shaft
Shaft diameter D [mm]	10
Wavelength L [mm]	20
Shaft material	Stainless steel
Housing material	Die-cast zinc

### Wiring diagram

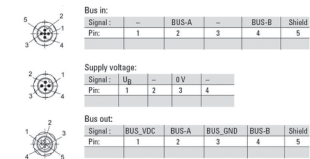

## Technical data

Electrical connection	Bus connection
	3 x M12
Axial shaft load	40 N
Radial shaft load	80 N
Vibration resistance (EN 60068-2-6)	100 m/s <sup>2</sup> , 55...2000 Hz
Shock resistance (EN 60068-2-27)	2500 m/s <sup>2</sup> , 6 ms
Protection class housing	IP67
Protection class shaft	IP67

Signal	PB_A	PB_B	Shield	BUS_VDC	PB_A	BUS_GND	PB_B	Shield	-
Signal -Pin	BUS in 2	BUS in 4	BUS in 5	BUS out 1	BUS out 2	BUS out 3	BUS out 4	BUS out 5	-
Power	U <sub>B</sub>	-	0V	-	-	-	-	-	-
Power- Pin	1	2	3	4	5	-	-	-	-