


BI1-EH04K-AP6X
电感式传感器

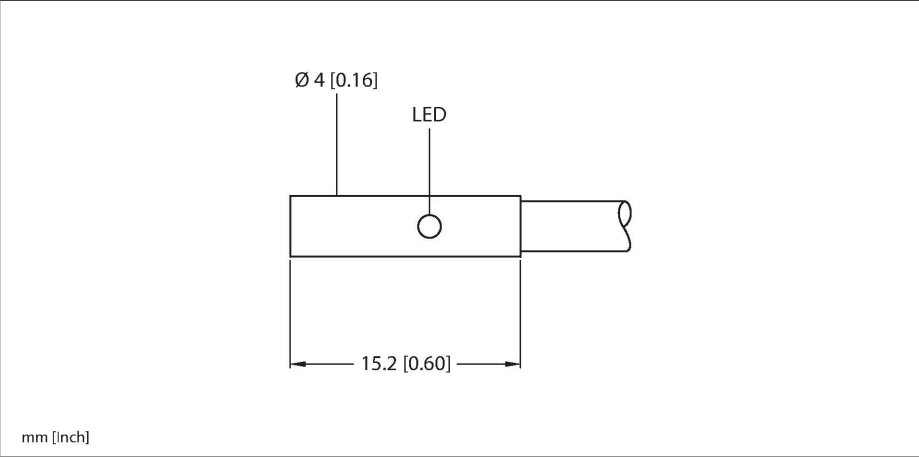


技术数据

型号	BI1-EH04K-AP6X
货号	4609767
常用数据	
额定开关距离	1 mm
安装条件	齐平
安全工作距离	$\leq (0.81 \times S_n)$ mm
修正系数	37#钢 = 1; 铝 = 0.3; 不锈钢 = 0.7; 黄铜 = 0.4
重复精度	$\leq 2\%$ 满量程
温度漂移	$\leq \pm 10\%$
磁滞	10 %
电气数据	
工作电压 U_B	10...30 VDC
纹波电压 U_{ss}	$\leq 10\% U_{Bmax}$
额定直流工作电流 I_o	≤ 100 mA
空载电流	≤ 15 mA
漏电流	≤ 0.1 mA
隔离测试电压	0.5 kV
短路保护	是/循环
I_o 时的压降	≤ 1.8 V
断线/反极性保护	是/是
输出性能	3线, 常开触点, PNP
开关频率	2 kHz
机械数据	
设计	光滑圆柱, 4 mm
尺寸	15.2 mm
外壳材料	不锈钢型, 1.4305 (AISI 303)

特点

- 光滑圆柱, Ø 4 mm
- 不锈钢1.4305 (AISI 303)
- 3线直流, 10...30 VDC
- 常开触点, PNP输出
- 线缆连接

接线图



功能原理

电感式传感器以非接触和无磨损的方式检测金属物体。以无磨损和非接触的方式检测金属物体。电感式传感器通过铁氧体线圈上构成的RLC线圈产生磁场。

技术数据

感应面材料	塑料, PA6.6
电气连接	线缆
线缆材质	Ø 3.3 mm, 灰, LifY-11Y, PUR, 2 m
导体横截面	3 x 0.14 mm²
环境条件	
工作温度	-25...+70 °C
防震动性	55 Hz (1 mm)
防冲击性	30 g (11 ms)
防护等级	IP67
MTTF	2283 年 符合SN 29500 (Ed.99) 40 °C认证
开关状态指示	LED指示灯, 黄色

安装说明

安装说明/描述

The image contains three technical diagrams illustrating the installation of a sensor. The top diagram shows a side view of the sensor with a dimension line labeled 'T' indicating the thickness of the mounting plate. The middle diagram shows a top view of the sensor with a dimension line labeled 'G' indicating the distance between the sensor and the mounting plate. The bottom diagram shows a side view of the sensor with dimensions 'N', 'S', 'D', and 'W' indicating various distances and widths.

距离D	$2 \times B$
距离W	$3 \times S_n$
距离T	$3 \times B$
距离S	$1.5 \times B$
距离G	$6 \times S_n$
B有效面积直径	$\varnothing 4 \text{ mm}$

附件

MBS40

69477

固定夹具，安装模块材质： 电镀铝

