


RU100L-M18M-UP8X2-H1151 Ultrasonic Sensor - Retroreflective Sensor

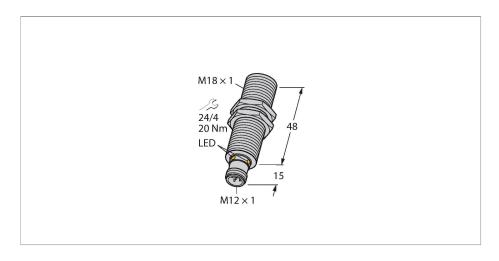



Technical data

Features

- ■Smooth sonic transducer face
- Cylindrical housing M18, potted
- Connection via M12 x 1 male
- Temperature compensation
- ■Teach-in range: 15...98 cm
- Resolution: 1 mm
- ■Aperture angle of sonic cone: ±16 °
- ■1 x switching output, PNP
- Configurable via Teach-In
- Parameterizable NO/NC

Wiring diagram

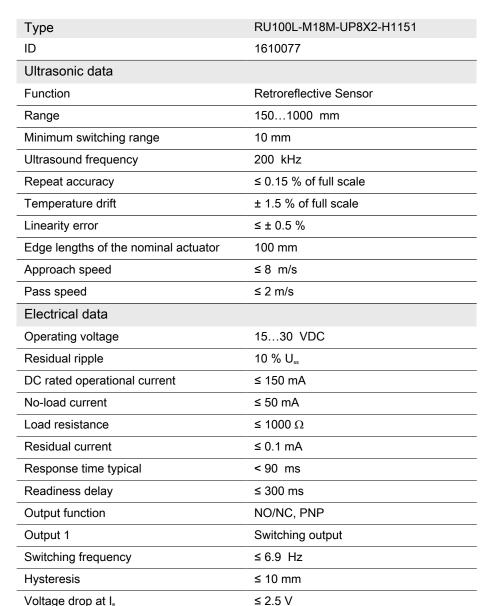




Functional principle

Ultrasonic sensors capture a multitude of objects contactlessly and wear-free with ultrasonic waves. It does not matter whether the object is transparent or opaque, metallic or non-metallic, firm, liquid or powdery. Even environmental conditions such as spray, dust or rain hardly affect their function. The sonic cone diagram indicates the detection range of the sensor. In accordance with standard EN 60947-5-2, quadratic targets in a range of sizes (20 × 20 mm, 100 × 100 mm) and a round rod with a diameter of 27 mm are used.

Important: The detection ranges for other targets may differ from those for standard targets due to the different reflection properties and geometries.

Sonic Cone






Technical data

Short-circuit protection	yes / Cyclic		
Reverse polarity protection	yes		
Wire breakage protection	yes		
Setting option	Remote Teach		
Mechanical data			
Design	Threaded barrel, M18		
Radiation direction	straight		
Dimensions	Ø 18 x 63 mm		
Housing material	Metal, CuZn, Nickel Plated		
Max. tightening torque of housing nut	20 Nm		
Transducer material	Plastic, Epoxyd resin and PU foam		
Electrical connection	Connector, M12 × 1, 5-wire		
Ambient temperature	-25+70 °C		
Storage temperature	-40+80 °C		
Pressure resistance	0.55 bar		
Protection class	IP67		
Switching state	LED, Yellow		
Object detected	LED, Green		
Tests/approvals			
MTTF	281 years acc. to SN 29500 (Ed. 99) 40 °C		
Declaration of conformity EN ISO/IEC	EN 60947-5-2		
Vibration resistance	IEC 60068-2		
Approvals	CE cULus		

Mounting instructions

Mounting instructions/Description



Teaching the reflector position
The ultrasonic sensor features a switching
output with a teachable switching range. The
green and yellow LEDs indicate whether the
sensor has detected the object.

A switching range is taught in. This must be within the detection range. In this operating mode, the taught reflector position is detected permanently without an object.

Easy-Teach

- Connect the teach adapter TX1-Q20L60 between the sensor and connection cable
- Stationary reflector within the detection range
- •Press and hold button for at least 2 s against Gnd

After a successful teach-in, the green LED flashes at 3 Hz and the sensor runs automatically in normal mode.




• To invert the output function, press and hold the button against the Ub for 2...7s

LED response

In standard operating mode, the two LEDs indicate the switching state of the sensor.

- · Green: reflector within the detection range
- Yellow: object between the sensor and reflector

Accessories

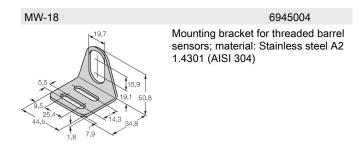

Accessories

Dimension drawing	Туре	ID	
M12x1 e15	RKC4.5T-2/TEL	6625016	Connection cable, M12 female connector, straight, 5-pin, cable length: 2 m, jacket material: PVC, black; cULus approval
0 15 M12 x 1 26.5	WKC4.5T-2/TEL	6625028	Connection cable, M12 female connector, angled, 5-pin, cable length: 2 m, jacket material: PVC, black; cULus approval

Accessories

