


Measuring Light Screen Emitter BMEL1232A



		Minim
Туре	BMEL1232A	Scan
ID	3038529	Max.
		Opera
Optical data		contro
Function	Opposed mode sensor (emitter)	Protec
Operating mode	Emitter	
Light type	IR	Adjus
Wavelength	880 nm	
Optical resolution	9.7 mm	
Range	6006100 mm	Functior
Scan field	295 mm	Measurin
Number of beams	32	precise d
		as produ
Electrical data		guiding, I
Operating voltage U _a	11.414 VDC	Each sys
		and a co
Mechanical data		with seve
Design	Rectangular, Mini Array	dependir
Housing material	Metal, AL	also enal R485, eit
Lens	plastic, Acrylic	R465, en
Electrical connection	Connector, 7/8"	the meas
Ambient temperature	-20+70 °C	mode. De
Protection class	IP65	the instru
Tests/approvals		
Approvals	CE	
Approvals	CE	
	cULus recognized	

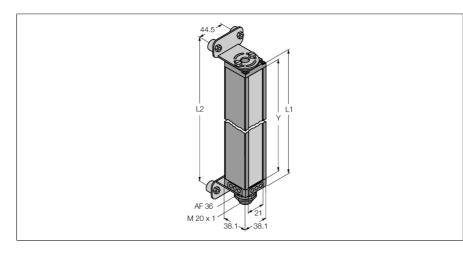

- Minimum target size 9.7 mm
- Scan field 286 mm
- Max. sensing range 6.1 m
- Operating voltage 11.8...12.2 VDC (from controller)
- Protection class IP65
- Adjustment via software

Functional principle

Measuring light screens are ideally suited for precise detection and inspection tasks such as product profiling, sizing, edge and centre guiding, hole and parts detection and the like. Each system consists of an emitter, receiver and a controller module, which is equipped with several switching and analogue outputs, depending on the specific version. The device also enables data transmission via RS232 or R485, either in an binary or ASCII code format. The scan times depend on the height of the measuring array and the adjusted scan mode. Detailed infomation can be taken from the instruction manual.