


K50PTCKQ Pick-to-Light – Placement Sensor Capacitive Sensor





Туре	K50PTCKQ
ID	3806179
Signal and display data	
Purpose	Pick-to-Light
Function	Touch Button
Light type	RGB
Switch Function	Programmable
Dimmable	Programmable
Features of color 1	RGB, Programmable
Special features	I/O module-compatible Wash down
Electrical data	
Operating voltage U _B	1230 VDC
DC rated operating current I _e	≤ 150 mA
Max. current consumption per color	115 mA
Communication protocol	IO-Link
Output function	Programmable, PNP/NPN
Input type	Communication protocol
Response time typical	< 300 ms
IO-Link	
IO-Link specification	V 1.1
Communication mode	COM 2 (38.4 kBaud)
Process data width	16 bit
Frame type	Type_2_2
Function pin 4	IO-Link
Maximum cable length	20 m

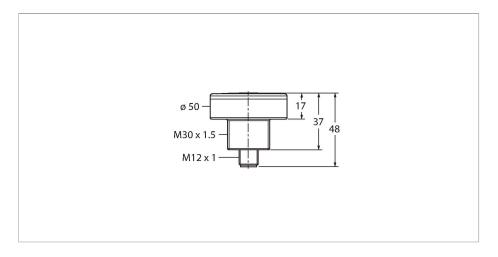

Features

- Protection class IP67/IP69K
- ■M12 × 1 connector
- RGB LED display
- Control of user-defined or predefined light colors
- Flashing function, alternation, 2-color display, intensity check and other animations
- Parameterizable via IO-Link
- Capacitive sensor of the second generation
- High immunity to false actuation by splashing, detergents, oils and other contaminants

Wiring diagram



Functional principle

The K50 pick-and-place sensor is suitable for many mounting and component placement applications. The green work light or other signal lights are reflected perfectly by the entire dome (depending on the version). The transistor output can be easily connected to a system control, which is programmed for a special task sequence. The work light of the sensor is located in or next to every bin at the operator's workstation and indicates: 1. The bins with the components to be picked up for a particular work step and 2. the sequence in which the components have to be picked up. If the operator removes a part from the bin, the K50 detects the hand in the bin and sends a signal to the control unit. The system then checks if the

Technical data

Included in the SIDI GSDML	Yes		
Mechanical data			
Design	Puck, K50C		
Dimensions	Ø 50 x 48 mm		
Housing material	Plastic, PC, Black		
Window material	Polycarbonate, diffuse		
Electrical connection	Connector, M12 × 1, PVC		
Number of cores	4		
Ambient temperature	-40+50 °C		
Relative humidity	090 %		
Protection class	IP67 IP69		
Tests/approvals			
MTTF	146 years acc. to SN 29500 (Ed. 99) 40 °C		
Approvals	CE, cULus listed		

correct component has been picked up and – depending on the configuration – switches the corresponding work light off and the next one on, according to the assembly sequence. The work sequence control leads to increased efficiency, improved quality control and reduces rework and testing expenses. The term work light therefore refers to the visual indicator of the bin from which a part should be removed next. The actuation indicator confirms the removal with a different color. The mispick indicator illuminates if a bin was reached into when the work light was not set

Accessories

SMB30A	3032723	SMB30SC	
Mounting bracket rectangular			

Mounting bracket, rectangular, stainless steel, for sensors with 30mm thread


12,7 66,5 M30 x 1,5 0 7 50,8

Mounting bracket, PBT black, for sensors with 30 mm thread, rotatable

3052521



SMB30FA 3074005



Montagewinkel; Werkstoff VA 1.4401