


Compact Multiprotocol I/O Module for Ethernet

16 Digital PNP 2-A Outputs

TBEN-L4-16DOP

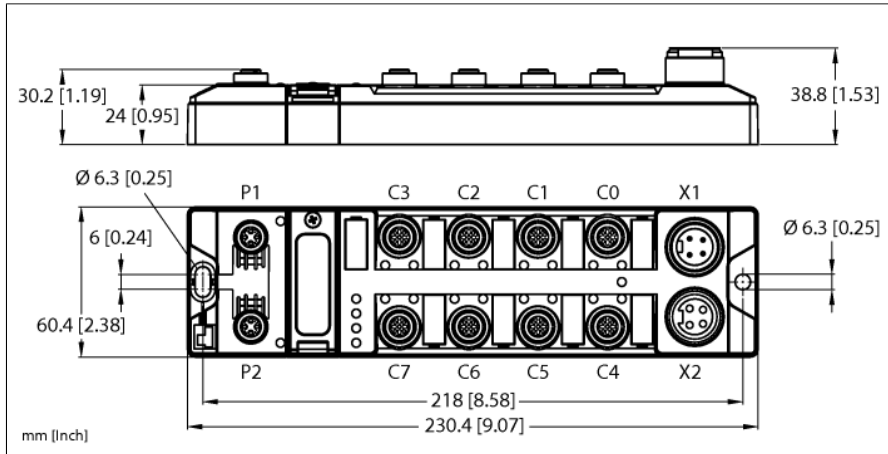

| | |
|-------------------------------------|--|
| Type | TBEN-L4-16DOP |
| ID | 6814011 |
| Supply | |
| Supply voltage | 24 VDC |
| Admissible range | 18...30 VDC Total current max. 9 A per voltage group Total current V1 + V2 max. 11 A |
| Voltage supply connection | 4-pin male 7/8" connector X1 |
| Operating current | V1: max. 150 mA |
| Sensor/actuator supply | supply of ports C0-C7 from V2 short-circuit proof, 120 mA per port |
| Electrical isolation | galvanic isolation of the voltage groups V1 and V2, voltages up to 500 VAC |
| Power dissipation, typical | ≤ 10 W |
| System data | |
| Fieldbus transmission rate | 10/100 Mbps |
| Fieldbus connection technology | 2 × M12, 4-pin, D-coded |
| Protocol detection | automatic |
| Web server | Default: 192.168.1.254 |
| Service interface | Ethernet via P1 or P2 |
| BEEP functionality | Supported |
| Field Logic Controller (FLC) | |
| ARGEE Firmware Version | 3.2.9.0 |
| ARGEE Engineering Version | 2.0.24.0 |
| Modbus TCP | |
| Addressing | Static IP, DHCP |
| Supported function codes | FC1, FC2, FC3, FC4, FC5, FC6, FC15, FC16, FC23 |
| Number of TCP connections | 8 |
| Input register start address | 0 (0x0000 hex) |
| Output register start address | 2048 (0x0800 hex) |

- PROFINET device, EtherNet/IP device or Modbus TCP slave
- Integrated Ethernet switch
- Supports 10 Mbps/100 Mbps
- 2 × M12, 4-pin, D-coded, Ethernet fieldbus connection
- PROFINET S2 system redundancy
- Glass fiber reinforced housing
- Shock and vibration tested
- Fully potted module electronics
- Protection classes IP65, IP67, IP69K
- 7/8" male connector for power supply, 4-pin
- Galvanically isolated voltage groups
- ATEX Zone 2/22
- Max. 2 A per output
- Output diagnostics per channel
- Programmable ARGEE

| Ethernet/IP | |
|---------------------------------|-----------------------------------|
| Addressing | acc. to EtherNet/IP specification |
| Quick Connect (QC) | < 150 ms |
| Device Level Ring (DLR) | supported |
| Class 3 connections (TCP) | 3 |
| Class 1 connections (CIP) | 10 |
| Input Assembly Instance | 101 |
| Output Assembly Instance | 102 |
| Configuration Assembly Instance | 106 |

| PROFINET | |
|---------------------------------|---------------------------------|
| Version | 2.35 |
| Addressing | DCP |
| Conformance class | B (RT) |
| MinCycleTime | 1 ms |
| Fast Start-Up (FSU) | < 150 ms |
| Diagnostics | acc. to PROFINET alarm handling |
| Topology detection | supported |
| Automatic addressing | supported |
| Media Redundancy Protocol (MRP) | supported |
| System redundancy | S2 |
| Netload class | 3 |

| Digital outputs | |
|----------------------------|---|
| Number of channels | 16 |
| Connectivity outputs | M12, 5-pin |
| Output type | PNP |
| Type of output diagnostics | Channel diagnostics |
| Output voltage | 24 VDC from potential group |
| Output current per channel | 2.0 A, short-circuit proof, max. 2.0 A per port |
| Output delay | 1.3 ms |
| Load type | EN 60947-5-1: DC-13 |
| Short-circuit protection | yes |
| Electrical isolation | Galvanically isolated to the fieldbus Voltage proof up 500 VDC |

| Standard/Directive conformity | |
|-------------------------------|---|
| Vibration test | Acc. to EN 60068-2-6 Acceleration up to 20 g |
| Shock test | acc. to EN 60068-2-27 |
| Drop and topple | acc. to EN 60068-2-31/IEC 60068-2-32 |
| Electromagnetic compatibility | Acc. to EN 61131-2 |
| Approvals and certificates | CE FCC statement, FM class I, zone 2, UV resistant acc. to DIN EN ISO 4892-2A (2013) |
| UL Certificate | cULus LISTED 21 W2, Encl.type 1 IND.CONT.EQ. |
| Note on ATEX/IECEx | The Quick Start Guide with information on use in Ex Zones 2 and 22 must be observed. |


| General Information | |
|-------------------------|---|
| Dimensions (W x L x H) | 60.4 x 230.4 x 39 mm |
| Ambient temperature | -40...+70 °C |
| Storage temperature | -40...+85 °C |
| Altitude | Max. 5000 m |
| Protection class | IP65 IP67 IP69K |
| MTTF | 165 years acc. to SN 29500 (Ed. 99) 20 °C |
| Housing material | PA6-GF30 |
| Housing color | Black |
| Male connector material | Nickel-plated brass |
| Window material | Lexan |
| Material screw | 303 stainless steel |
| Material label | Polycarbonate |
| Halogen-free | yes |
| Mounting | 2 mounting holes □ 6.3 mm |

Note the numbering of the IO range:
From firmware version 3.2.9.0 and higher, ports C0 to C7 and channels CH0 to CH7 are counted. For more details on the corresponding change see manual.






Note
 Ethernet cable (example):
 RSSD-RSSD-4416-2M
 Ident. no. 6441652

M12 x 1 Ethernet




Note
 Actuator and sensor cable/PUR connection cable (example):
 RKC4.4T-2-RSC4.4T/TXL
 Ident.no. 6625608
 Connection cable with Y piece for single assignment
 VBRS4.4-2RKC4T-1/1/TEL
 Ident. no. 6628199

M12 x 1 Output

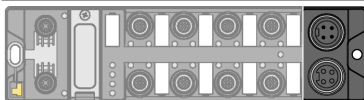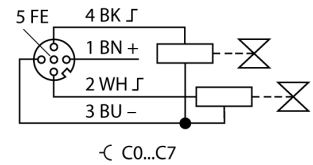

Note
 Power supply cable (example):
 RKM43-1-RSM43
 ID number 6914312

7/8" Power Supply

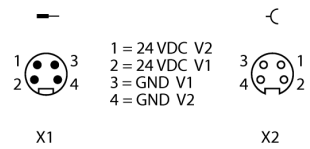

Module Status LED

| LED | Color | Status | Description | |
|--|--|--|--|---------------------------------|
| ETH1/ETH2 | Green | On | Ethernet link (100 Mbps) | |
| | | Flashing | Ethernet communication (100 Mbps) | |
| | Yellow | On | Ethernet link (10 Mbps) | |
| | | Flashing | Ethernet communication (10 Mbps) | |
| | | Off | No Ethernet link | |
| BUS | Green | On | Active connection to a master | |
| | | Flashing | Steady flashing: Ready for operation Sequence of 3 flashes in 2 seconds: FLC/ARGEE active | |
| | Red | On | IP address conflict or Restore mode or Modbus timeout | |
| | | Flashing | Blink/Wink command active | |
| | Green/red | Alternating | Autonegotiation and/or waiting for DHCP/Boot-P addressing | |
| | | Off | Power off | |
| ERR | Green | On | No diagnostics available | |
| | Red | On | Diagnostics available Undervoltage diagnosis response is parameter dependent | |
| | | | | |
| | LED response master in the Beep network: | | | |
| | Green | 1 Hz, 250 ms off | Cyclical IO data exchange | |
| | Red/green | 1 Hz, 250 ms red | Cyclical IO data exchange, diagnostics available | |
| | Green/red | 1 Hz, alternating | Discovery mode active | |
| | Red | | Discovery mode active, diagnostics available | |
| | PWR | LED response parameter (PWR) at V_2 undervoltage = "red" | | |
| | | Green | On | V_1 and V_2 power supply OK |
| Red | | On | V_2 power supply off or V_2 undervoltage | |
| | | Off | V_1 power supply off or V_1 undervoltage | |
| LED response parameter (PWR) at V_2 undervoltage = "green" | | | | |
| Green | | On | V_1 and V_2 power supply OK | |
| | | Flashing | V_2 power supply off or V_2 undervoltage | |
| | | Off | V_1 power supply off or V_1 undervoltage | |

LED Status I/O

| LED | Color | Status | Description |
|--------------|-------|----------|--|
| LED 0 ... 15 | Green | ON | Output active |
| | Red | ON | Output active with overload/short circuit |
| | | Flashing | Power overload at the corresponding port. Both port LEDs are flashing. |
| | | OFF | Output inactive |

Process Data Mapping of the Single Protocols

For more details on the corresponding protocols see manual.