


# Accessories

## Mounting Kit

### BTS-DSU35-Z07

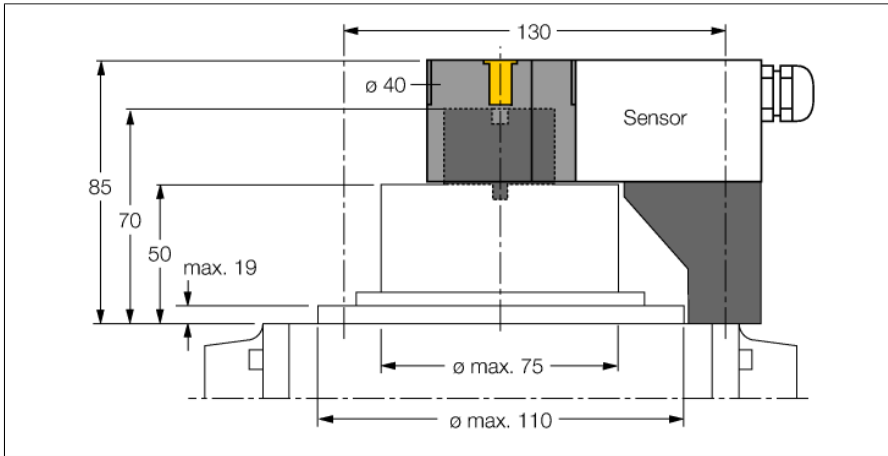

Mounting kit for larger rotary actuators:  
 Ø spacer plate and snap ring: max. 110 mm  
 Hole pattern on flange surface: 30 x 130 mm  
 Connection shaft (shaft extension) height:  
 50 mm/Ø: max. 75 mm  
 Included in delivery:  
 1 spacer plate 50 mm (POM)  
 1 spacer ring Ø 20 mm (PP-GF30)  
 Mounting the spacer plate:  
 2 cylinder screws M5 x 12 [DIN 912-A2]  
 2 cylinder screws M5 x 65 [DIN 912-A2]  
 4 lock washers A5 [DIN 137-A2]  
 Mounting the puck with spacer ring:  
 1 countersunk screw M6 x 45 [DIN 7991-A2]  
 The spacer ring has a 4 x 4 mm cross-shaped notch allowing the actuator to be mounted offset by 90°, suited for crosswise-mounted drives.

Type	BTS-DSU35-Z07
ID	6900403
Design	Accessories for dual sensor, Ni4-DSU35...
Housing material	Plastic, PP-GF30

#### General description

Dual sensors are especially designed for position detection in rotary actuators. They combine the reliability of non-contact inductive sensors with the flexibility of a modular housing system. A broad range of practice-oriented accessories ensure optimal adaption to your system.

