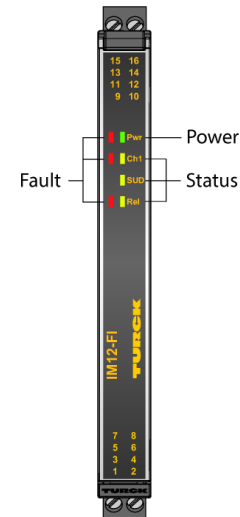
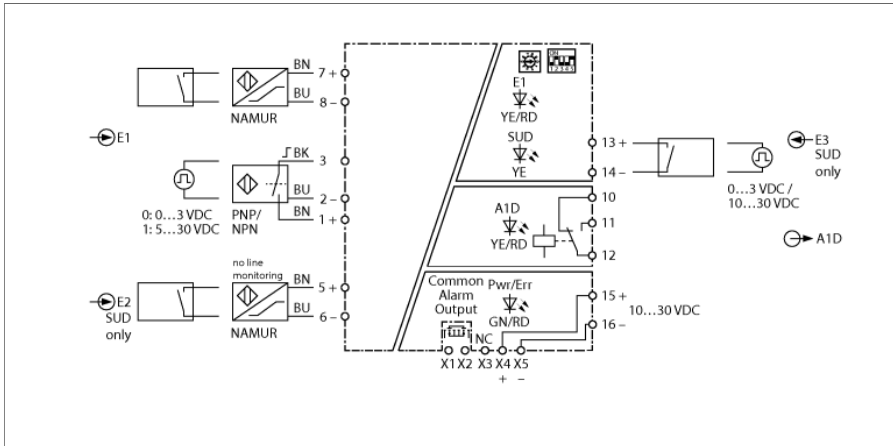


Frequency Transducer/Pulse Counter 1-channel IM12-FI01-1SF-1R-PR/24VDC



The frequency transducer IM12-FI01-1SF-1R-PR/24VDC transmits frequency signals up to 20,000 Hz galvanically isolated. This device is used for monitoring limit values. The device is suitable for use in Zone 2.

The one-channel device is equipped with two inputs for the connection of sensors acc. to EN 60947-5-6 (NAMUR) or potential-free contacts. A 3-wire input and a pulse input are also available. A changeover relay is available on the output side. The device can be powered from a power bridge that also transmits a collective fault signal.

The device is parameterized via rotary coding switches and DIP switches on the side of the device. The relay output is used to monitor whether a limit value exceeds or undershoots a limit value or lies outside a limit value window. Depending on the parameter, the start-up delay (SUD) is activated via input E2 or E3.

The devices have a green and a red Power LED (Pwr) for indicating the operating voltage and the parameterization. For each input circuit there is a yellow and a red status LED. An error in the input circuit causes the red LED to flash according to NE44. A yellow LED indicates the switch-on delay. A red and a yellow LED are available to indicate the switching status of the relay.


The device can be used in safety circuits up to SIL2 (high and low demand according to IEC 61508) and meets the requirements of NE21. It is equipped with removable screw terminals.

The device is equipped with removable screw terminals.

- Input circuits monitored for wire break and short circuit
- Parameterized via DIP/rotary coding switch
- Complete galvanic isolation
- Input reverse-polarity protected
- Removable screw terminals
- Power bridge (connector incl. in delivery)
- Installation in Zone 2
- SIL 2





Dimensions

Type	IM12-FI01-1SF-1R-PR/24VDC
ID	7580220
Nominal voltage	24 VDC
Operating voltage U_s	10...30 VDC
Power consumption	≤ 3 W
Power dissipation, typical	≤ 1.7 W
Monitoring range/Setting range	0.0006...1,200,000 rpm
NAMUR input	
NAMUR	EN 60947-5-6
No-load voltage	8.2 VDC
Short-circuit current	8.2 mA
Input resistance	1 kΩ
Cable resistance	≤ 50 Ω
Switch-on threshold	1.75 mA
Switch-off threshold	1.55 mA
Wire breakage threshold	≤ 0.06 mA
Short-circuit threshold	≥ 6.4 mA
3-wire input	
No-load voltage	12 VDC
0-signal	0...3VDC
1-signal	5...30 VDC
External signal source	
0-signal	0...3 VDC
1-signal	5...30 VDC
Output circuits	
Output circuits (digital)	1 x relay (change-over)
Output switching voltage relay	≤ 30 VDC / ≤ 250 VAC
Switching current per output	≤ 2 A
Switching capacity per output	≤ 500 VA/60 W
Switching frequency	≤ 15 Hz
Contact quality	AgNi
Power-Bridge common alarm output	MOSFET, $U_{max} = 30 V$, $I_{max} = 100 mA$
Galvanic isolation	
Test voltage	2.5 kV RMS
E1,E2-E3	375 V peak value acc. to EN 60079-11
E1,E2 supply voltage	375 V peak value acc. to EN 60079-11
E1,E2 collective fault indicator	375 V peak value acc. to EN 60079-11
Important note	For Ex-applications the values specified in the corresponding Ex certificates (ATEX, IECEx, UL, etc.) apply.
Important note	If the device is used in applications to achieve functional safety according to IEC 61508, the safety manual must be used. Information in the data sheet are not valid for functional safety.
Use in SIL safety circuits	SIL 2 acc. to IEC 61508
Displays/Operating elements	
Operational readiness	Green
Switching state	Yellow
Error indication	red



Mechanical data		
Protection class	IP20	
Flammability class acc. to UL 94	V-0	
Ambient temperature	-25...+70 °C	
Storage temperature	-40...+80 °C	
Dimensions	120 x 12.5 x 117 mm	
Weight	1 g	
Mounting instructions	DIN rail (NS35)	
Housing material	Plastic, Polycarbonate/ABS	
Electrical connection	Removable screw terminals, 2-pin	
Connection variant	Power bridge with collective fault signal	
Terminal cross-section	0.2...2.5 mm ² (AWG: 24...14)	
Tightening torque	0.5 Nm	
Tightening torque	4.43 LBS-Inch	
Environmental conditions	Operating height	Up to 2000 m above sea level
	Pollution degree	II
	Surge/Overvoltage category	II (EN 61010-1)
	Standards used	
	Voltage resistance and insulation	
		EN 50178
		EN 61010-1
		EN 50155
		GL VI-7-2
	Shock	
		EN 61373 class B
		EN 50155
		GL VI-7-2
		EN 60068-2-6
		EN 60068-2-27
	Temperature	
		EN 60068-2-1 Ad
		EN 50155
		GL VI-7-2
		EN 60068-2-2 Bd
		EN 60068-2-1
	Air humidity	
		EN 60068-2-38
	EMC	
		EN 50155
		GL VI-7-2
		NE21
		EN 61326-1
		EN 61326-3-1
		EN 61000-4-2
		EN 61000-4-3
		EN 61000-4-4
		EN 61000-4-5
		EN 61000-4-6
		EN 61000-4-11
		EN 61000-4-29
		EN 55011
		EN 55016
		EN 50121-3-2
		EN 61000-6-2

Accessories

Type code	Ident no.		Dimension drawing
IMC 1.5/ 5-ST-3.81 BK	7580954	Power Bridge Connection Terminal	
MCVR 1.5/ 5-ST-3.81 BK	7580955	Power Bridge Connection Terminal	
MC 1.5/ 5-ST-3.81 BK	7580956	Power Bridge Connection Terminal	
E/ME TBUS NS35 BK	7580957	Power Bridge Connection Terminal	
IMX12-SC-2X-4BK	7580940	Screw terminals for IM(X)12 modules; included in delivery: 4 pcs. of 2-pin black terminals	
IMX12-CC-2X-4BK	7580942	Spring terminals for IM(X)12 modules; included in delivery: 4 pcs. black terminals, 2-pin	