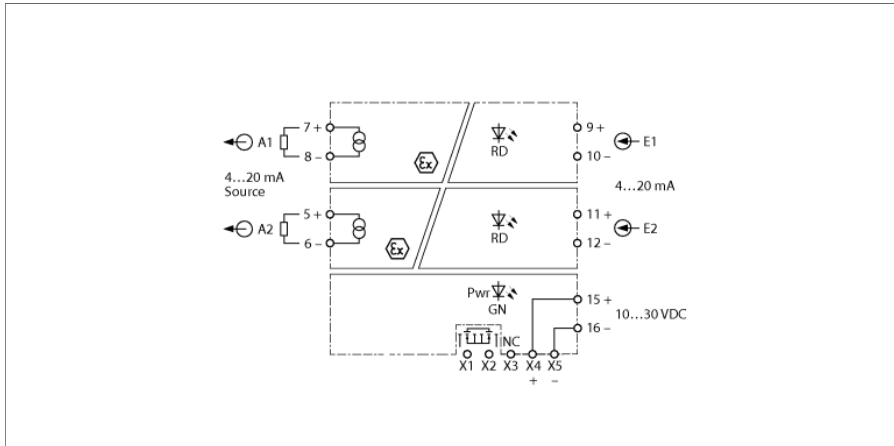


Analog Signal Isolator 2-channel IMX12-AO01-2I-2I-HPR/24VDC



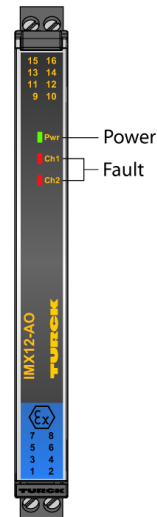
The 2-channel IMX12-AO01-2I-2I-HPR/24VDC signal isolator is designed to transmit the normalized current signal galvanically isolated 1:1 from the non-Ex area to the Ex-area. In addition to the analog signal also digital HART® communication signals can be transmitted bidirectionally. Typical applications are for example, the control of I/P converters or indicators in the Ex area. The device can be powered from a power bridge that also transmits a collective fault signal.


The Pwr LED lights green to indicate operational readiness. The device can detect a wire break or short circuit on the field side, the input then switches to a high impedance state and the common alarm output switches to conductive. A fault in the input circuit leads to a flashing red LED according to NE44.

The device can be used in safety circuits up to SIL2 (high and low demand according to IEC 61508) and meets the requirements of the NE21. It is equipped with removable screw terminals.

The device is equipped with removable screw terminals.

- Output circuits monitored for wire-break and short-circuit
- Complete galvanic isolation
- HART transparent
- Removable screw terminals
- Power bridge (connector incl. in delivery)
- ATEX, IECEx, cFM, cUL, NEPSI, IN-METRO, Kosha, TR CU EAC CMI, TIIS, Russia Pattern Approval
- Installation in zone 2
- SIL 2






Dimensions


Type	IMX12-AO01-2I-2I-HPR/24VDC
ID	7580404
Nominal voltage	24 VDC
Operating voltage U_s	10...30 VDC
Power consumption	$\leq 2.2 \text{ W}$
Power dissipation, typical	$\leq 1.31 \text{ W}$
Input current	$2 \times 4...20 \text{ mA}$
Output circuits	
Output current	$2 \times 4...20 \text{ mA}$
Load resistance current output	$\leq 0.8 \text{ k}\Omega$
Minimum load	$\geq 50 \Omega$
Short-circuit	At a load resistance of $< 30 \Omega$, the input current is $< 500 \mu\text{A}$
Wire break	at a load resistance of $> 30 \text{ k}\Omega$ the input current is $< 500 \mu\text{A}$
Power-Bridge common alarm output	MOSFET, $U_{\text{max}} = 30 \text{ V}$, $I_{\text{max}} = 100 \text{ mA}$
Response characteristic	
Rise time (10...90 %)	$\leq 10 \text{ ms}$
Fall time (90...10 %)	$\leq 10 \text{ ms}$
Measuring accuracy (including linearity, hysteresis and repeatability)	$\leq 0.05 \%$ of full scale
Reference temperature	$23 \text{ }^\circ\text{C}$
Temperature drift	$\leq 0.002 \%$ of full scale/K
Galvanic isolation	
Test voltage	2.5 kV RMS
Input 1 to output 1	375 V peak value acc. to EN 60079-11
Input 2 to output 2	375 V peak value acc. to EN 60079-11
Input 1 to supply	150 V RMS according to EN 50178 and EN 61010-1
Input 2 to supply	150 V RMS according to EN 50178 and EN 61010-1
Output 1 to supply	375 V peak value acc. to EN 60079-11
Output 2 to supply	375 V peak value acc. to EN 60079-11
Output 1 to output 2	50 V RMS according to EN 50178 and EN 61010-1
Input 1 to input 2	150 V RMS acc. to EN 50178 and EN 61010-1
Important note	For Ex-applications the values specified in the corresponding Ex certificates (ATEX, IECEx, UL, etc.) apply.
Ex approval acc. to conformity certificate	TÜV 15 ATEX 153600 X
Application area	II (1) G, II (1) D
Ignition protection category	[Ex ia Ga] IIC; [Ex ia Da] IIIC
Application area	II 3 (1) G
Ignition protection type	Ex nA [ia Ga] IIC T4 Gc
Important note	If the device is used in applications to achieve functional safety according to IEC 61508, the safety manual must be used. Information in the data sheet are not valid for functional safety.
Use in SIL safety circuits	SIL 2 acc. to IEC 61508
Displays/Operating elements	
Operational readiness	Green
Error indication	red

Mechanical data		
Protection class	IP20	
Flammability class acc. to UL 94	V-0	
Ambient temperature	-25...+70 °C	
Storage temperature	-40...+80 °C	
Dimensions	120 x 12.5 x 117 mm	
Weight	169 g	
Mounting instructions	DIN rail (NS35)	
Housing material	Plastic, Polycarbonate/ABS	
Electrical connection	Removable screw terminals, 2-pin	
Connection variant	Power bridge with collective fault signal	
Terminal cross-section	0.2...2.5 mm ² (AWG: 24...14)	
Tightening torque	0.5 Nm	
Tightening torque	4.43 LBS-Inch	
Environmental conditions	Operating height	Up to 2000 m above sea level
	Pollution degree	II
	Surge/Overvoltage category	II (EN 61010-1)
	Standards used	
	Voltage resistance and insulation	
		EN 50178
		EN 61010-1
		EN 50155
		GL VI-7-2
	Shock	
		EN 61373 class B
		EN 50155
		GL VI-7-2
		EN 60068-2-6
		EN 60068-2-27
	Temperature	
		EN 60068-2-1 Ad
		EN 50155
		GL VI-7-2
		EN 60068-2-2 Bd
		EN 60068-2-1
	Air humidity	
		EN 60068-2-38
	EMC	
		EN 50155
		GL VI-7-2
		NE21
		EN 61326-1
		EN 61326-3-1
		EN 61000-4-2
		EN 61000-4-3
		EN 61000-4-4
		EN 61000-4-5
		EN 61000-4-6
		EN 61000-4-11
		EN 61000-4-29
		EN 55011
		EN 55016
		EN 50121-3-2
		EN 61000-6-2

Accessories

Type code	Ident no.		Dimension drawing
IMX12-SC-2X-4BK	7580940	Screw terminals for IM(X)12 modules; included in delivery: 4 pcs. of 2-pin black terminals	
IMX12-SC-2X-4BU	7580941	Screw terminals for IM(X) 12 modules; included in delivery: 4 pcs. of 2-pin blue terminals	
IMX12-CC-2X-4BK	7580942	Spring terminals for IM(X)12 modules; included in delivery: 4 pcs. black terminals, 2-pin	
IMX12-CC-2X-4BU	7580943	Spring terminals for IM(X)12 modules; included in delivery: 4 pcs. blue terminals, 2-pin	
IMC 1.5/ 5-ST-3.81 BK	7580954	Power Bridge Connection Terminal	
MCVR 1.5/ 5-ST-3.81 BK	7580955	Power Bridge Connection Terminal	
MC 1.5/ 5-ST-3.81 BK	7580956	Power Bridge Connection Terminal	
E/ME TBUS NS35 BK	7580957	Power Bridge Connection Terminal	