


Modul de extensie piconet pentru IP-Link


16 ieșiri digitale 0,5 A (4 A în total)

SNNE-0016D-0002

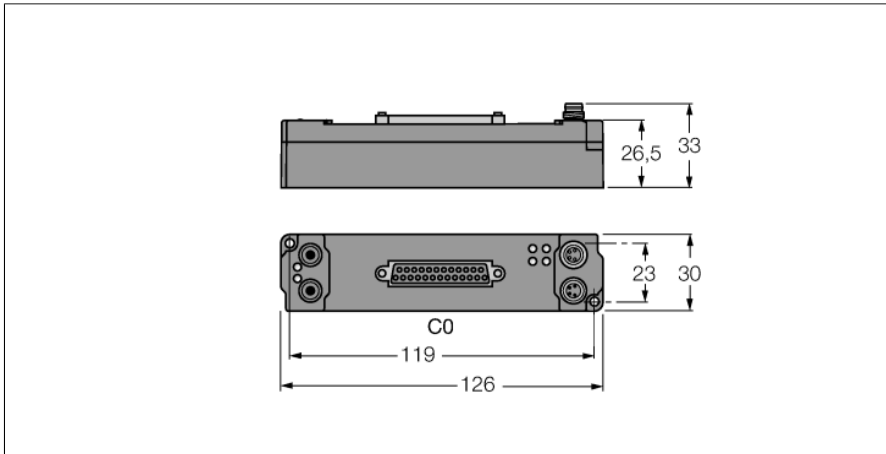


- Conexiune directă la IP link
- Carcasă armată cu fibră de sticlă
- Module încapsulate
- Conector metalic
- Grad de protecție IP67

Ieșire Sub-D



M8 × 1 Alimentare



Tip	SNNE-0016D-0002
Nr. ID	6824476
Număr de canale	16
Tensiune de alimentare / tensiune de sarcină	20...29 Vcc
Curent de alimentare	≤ 25 mA
Lungime fibră optică	≤ 15 m
Număr de canale	16 ieșiri digitale conform EN 61131-2
Tensiune de ieșire	20...29 Vcc de la tensiunea de alimentare
Curent de ieșire pe canal	0.5 A (Σ 4 A), protejat la scurtcircuit
Tip de sarcină	rezistiv, inductiv, bec de sarcină
Frecvență de comutare	≤ 500 Hz
Simultaneity factor	0.5
Dimensiuni (l x L x h)	30 x 126 x 26.5 mm
Test vibrații	Conf. cu EN 60068-2-6
Test la șocuri mecanice	conform DIN EN 60068-2-27
Compatibilitate electromagnetică (interferențe)	Conf. cu EN 61000-6-2/EN 61000-6-4
Clasă de protecție	IP20
Certificări	CE, cULus

Process image pentru date de intrare

		Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0	
PROFIBUS-DP coupling module: "Byte alignment" is disabled (default) and byte n has been used halfway. DeviceNet™, CANopen, INTERBUS, Ethernet coupling module: Byte n has been used halfway. Up to 8 bit user data are mapped.	Output	Byte n	C0P4	C0P3	C0P2	C0P1	is used by the physically preceding bit-oriented extension module connected via the IP Link.			
		Byte n+1	C0P12	C0P11	C0P10	C0P9	C0P8	C0P7	C0P6	C0P5
		Byte n+2	is used by the physically following bit-oriented extension module connected via the IP Link.				C0P16	C0P15	C0P14	C0P13
PROFIBUS-DP coupling module: "Byte alignment" is disabled (default) and the previous byte has been completely used or "byte alignment" is active. DeviceNet™, CANopen, INTERBUS, Ethernet coupling module: The previous byte has been completely used. Up to 8 bit user data are mapped.	Output	Byte n	C0P8	C0P7	C0P6	C0P5	C0P4	C0P3	C0P2	C0P1
		Byte n+1	C0P16	C0P15	C0P14	C0P13	C0P12	C0P11	C0P10	C0P9
		C... = Connector no. – P... = Pin no.								