


## Profibus-DPV1 Set in IP67

### TI-BL67-DPV1-6

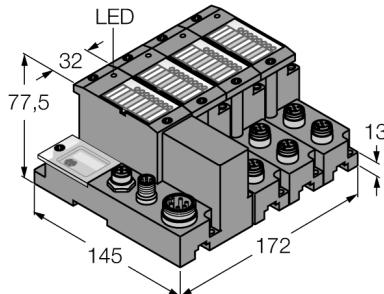

<b>Tip kodu</b>	TI-BL67-DPV1-6
Ident no.	1545030
Kanal sayısı	6
Boyutlar (W x L x H)	172 x 145 x 77.5 mm

<b>Besleme gerilimi</b>	24 VDC
max. system supply current $I_{mb\ (SV)}$	1.5, A
Max. sensor supply $I_{sens}$	4 A electronically limited current supply electronically limited current supply
max. load current $I_l$	10 A
Kabul edilebilir aralık	18...30 VDC


<b>Fieldbus iletişim hızı</b>	9.6 kbps ... 12 Mbps
Fieldbus adres aralığı	1...125
Fieldbus adresleme	3 decimaly coded rotary switches
Servis arayüzü	RS232 interface (PS/2 socket)
Fieldbus bağlantı teknolojisi	2 x M12, 5 pimli, ters kodlanmış
Gerilim besleme bağlantısı	7/8", 5 pimli
Fieldbus sonlandırma	external

<b>Transmission rate</b>	115,2 kb/sn
Elektrik yalıtımı	isolation of electronics and field level via opto-couplers


<b>Çıkış bağlantısı</b>	M12
<b>Sensör besleme</b>	0.5 A per channel, short-circuit proof
<b>Sıcaklık değer kaybı</b>	&#x0020;
> 55 °C Circulating air (Ventilation)	no limitation
> 55°C Sabit ortam havası	Isens < 3A, Imb < 1A
Bağıl nem	%5...95 (dahili), seviye RH-2, yoğuşmasız (45°C'de depolandığında)
Titreşim testi	EN 61131 uyarınca
Genişletilmiş titreşim direnci	VN 02-00 and higher
- up to 5 g (at 10 to 150 Hz)	for mounting on DIN rail no drilling according to EN 60715, with end bracket
- up to 20 g (at 10 up to 150 Hz)	for mounting on base plate or machinery The- therefore every second module has to be moun- ted with two screws each.
Darbe testi	IEC 60068-2-27 uyarınca
Düşme ve devrilme	acc. to IEC 68-2-31 and free fall to IEC 68-2-32
Elektromanyetik uyumluluk	EN 61131-2 uyarınca
IP Derecesi	IP67

- Cable max. 50 m between interface and read/write head
- 3 decimal rotary coding switches for the adjustment of the Profibus address
- Maximum transmission rate to the fieldbus 12 Mbps
- Two males M12 x 1, 5-pin reverse-keyed, for fieldbus connection
- One male 7/8", 5-pin, for power supply
- LEDs for display of supply voltage, group and bus errors as well as status and diagnostics
- Connection of up to 6 read/write heads via BL ident M12 extension cables
- Mixed operation of HF and UHF read/write heads


#### Kablo Bağlantı Şeması




#### PROFIBUS-DP DIŞ



#### PROFIBUS-DP



#### Güç Kaynağı



## Profibus-DPV1 Set in IP67

### TI-BL67-DPV1-6

---

**teslimata dahildir**

1 × uç plaka, BL67

**İşlevsel prensip**

The pin resp. signal assignment results from the combination with an electronic module. You find the pin configuration and the wiring diagrams on the data sheet of the corresponding electronic module.

BL67 base modules are connected to the right of the gateway, using two screws for each module. A DIN rail is not required. This way, a compact and stable unit is built. The unit can now be mounted on a DIN rail or directly on the machine.

The field devices are connected to the base modules which are available with different connection technology (M8, M12, M23 and 7/8").

**Note**

Further technical data like temperature range are determined by the electronic modules and can be found on the data sheets.

BL67 electronic modules are plugged on the purely passive base modules which in turn are connected to the field devices. The separation of connection level and electronics simplifies maintenance considerably. Flexibility is enhanced because the user can choose between base modules with different connection technologies.

The electronic modules are completely independent of the higher level fieldbus through the use of gateways.

BL67 ağ geçitleri, bir BL67 santralinin ana bileşenleridir. Modüler fieldbus nodlarını daha yüksek seviye fieldbus'a (PROFIBUS-DP, DeviceNet, CANopen, Ethernet, Modbus TCP, PROFINET, EtherCAT veya EtherNet/IP) bağlamak üzere tasarlanmıştır.

Tüm BL67 elektronik modülleri, verileri ağ geçidi ile fieldbus'a aktarılan dahili modül veri yolu üzerinden iletişim kurar. Bu nedenle tüm G/Ç modülleri veri yolu sisteminden bağımsız olarak yapılandırılabilir.

## Profibus-DPV1 Set in IP67

### TI-BL67-DPV1-6

#### Compatible base modules

Ölçekli çizim	Type	Pin configuration
	<b>Type</b> BL67-B-2M12 6827186 2 x M12, 5-pole, female, a-coded	<b>Konektörler .../S2500</b>  1 = BN (+) 2 = BK (Data) 3 = BU (GND) 4 = WH (Data) 5 = shield
		<b>.../S2501 Connectors</b>  1 = BN (+) 2 = WH (Data) 3 = BU (GND) 4 = BK (Data) 5 = shield
		<b>Connectors .../S2503</b>  1 = RD (+) 2 = BU (Data) 3 = BK (GND) 4 = WH (Data) 5 = shield

## Profibus-DPV1 Set in IP67

### TI-BL67-DPV1-6


#### LED display

LED	Color	Status	Meaning
D		OFF	No error message or diagnostics active.
	RED	ON	Failure of module bus communication. Check if more than 2 adjacent electronic modules are pulled. Relevant modules are located between gateway and this module.
	RED	FLASHING (0.5 Hz)	Upcoming module diagnostics
RW0 / RW1		OFF	No tag, no active diagnostics
	GREEN	ON	Tag available
	GREEN	FLASHING (2 Hz)	Data exchange with tag enabled
	RED	ON	Read/write head error
	RED	FLASHING (2 Hz)	Short-circuit in the supply line of read/write head

## Profibus-DPV1 Set in IP67

### TI-BL67-DPV1-6

#### Aksesuarlar

Tip kodu	İdent no.		Ölçekli çizim
RKM52-6M	6914145	Güç kaynağı kablosu, 7/8" dişli konektör, düz, 4 pimli + PE, kablo uzunluğu: 6 m, kılıf malzemesi: PUR, gri	
RSM-2RKM50	6914950	Güç kaynağı T ayırıcı, 1 x 7/8" erkek, 2 x 7/8" dişli, 5 pimli, izin verilen akım şiddet: 9 A, Nominal gerilim: 250 V, Sıcaklık: -40 °C ... +80 °C, paralel kablolanmış	