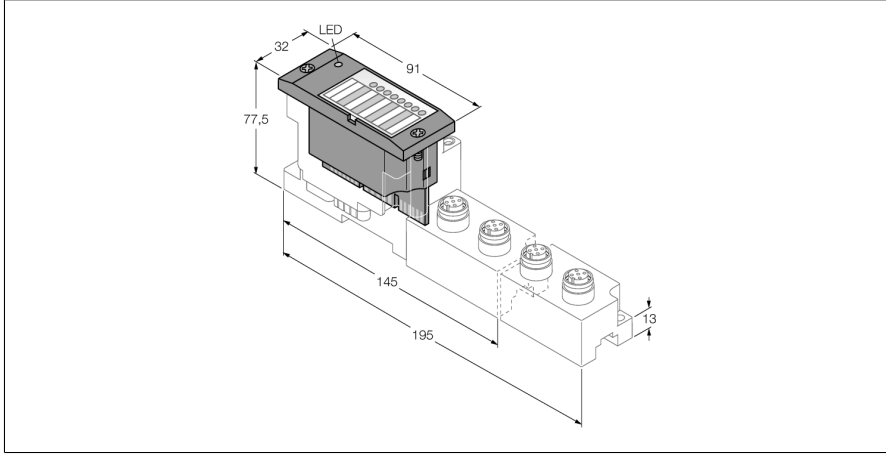


BL67 electronic module

Connection of SSI Encoders

BL67-1SSI



- Kullanılan fieldbus ve bağlantı teknolojisinden bağımsız
- Koruma sınıfı IP67
- LEDs indicate status and diagnostic
- Electronics galvanically separated from the field level via optocouplers
- Connection of SSI encoder
- Transmission rate, max. 1Mbps

İşlevsel prensip

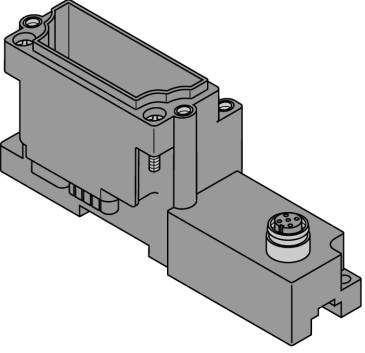

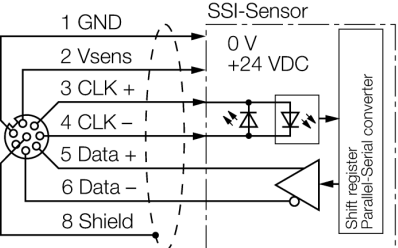
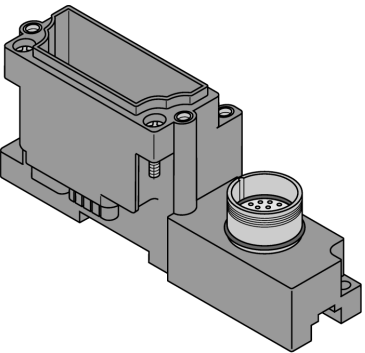

BL67 electronic modules are plugged on the purely passive base modules which in turn are connected to the field devices. The separation of connection level and electronics simplifies maintenance considerably. Flexibility is enhanced because the user can choose between base modules with different connection technologies.

The electronic modules are completely independent of the higher level fieldbus through the use of gateways.

Tip	BL67-1SSI
Tanit. no.	6827191
Kanal sayısı	1
Besleme gerilimi	24 VDC
Nominal voltage V_n	24 VDC
Alan beslemesinden gelen nominal akım	≤ 50 mA
Modül veri yolundan gelen nominal akım	≤ 50 mA
Max. sensor supply I_{sens}	500 mA not short-circuit proof
Güç dağılımı, tipik	≤ 1 W
İletim sinyalleri	CL, D
Bağlantı türü	4 kablolu tam dubleks (saat çıkışı/sinyal çıkışı)
Transmission rate	62,5 kb/sn'den 1 Mb/sn'ye kadar
Parametreler	transmission rate, diagnostics, data format (binary-/GRAY-coded), data frame bits (1-32), number of invalid bits (LSB: 0-15, MSB 0-7)
Kablo uzunluğu	30 m
Elektrik yalıtımı	isolation of electronics and field level via optocouplers
Çıkış bağlantısı	M12, M23
Tanımlama bayt sayısı	1
Parametre bayt sayısı	4
Giriş bayt sayısı	8
Çıkış bayt sayısı	8

Boyutlar (W x L x H)	32 x 91 x 59 mm
Onaylar	CE, cULus
Ortam sıcaklığı	-40...+70 °C
Saklama sıcaklığı	-40...+85 °C
Bağıl nem	%5...95 (dahili), seviye RH-2, yoğuşmasız (45°C'de depolandığında)
Titreşim testi	EN 61131 uyarınca
- up to 5 g (at 10 to 150 Hz)	for mounting on DIN rail no drilling according to EN 60715, with end bracket
- up to 20 g (at 10 up to 150 Hz)	for mounting on base plate or machinery Therefore every second module has to be mounted with two screws each.
Darbe testi	IEC 60068-2-27 uyarınca
Düşme ve devrilme	acc. to IEC 68-2-31 and free fall to IEC 68-2-32
Elektromanyetik uyumluluk	EN 61131-2 uyarınca
IP Derecesi	IP67
Tightening torque fixing screw	0.9...1.2 Nm

Compatible base modules

Ölçekli çizim	Type	Pin configuration
	<p>BL67-B-1M12-8 6827193 1 x M12, 8-pole, female</p> <p>Comments Matching connection cable (for example): BS8181-0 Ident no. 6901004 For connection of SSI sensors paired, shielded sensor cable is recommended.</p>	<p>Tel ataması</p>  <p>1 = GND 5 = Data + 2 = Vsens 6 = Data - 3 = CLK + 7 = n.c. 4 = CLK - 8 = shield</p> <p>Wiring Diagram</p> 
	<p>BL67-B-1M23 6827213 1 x M23, 12-pole, female</p> <p>Comments Wiring diagram see above. matching connection cable (for example): FW-M23ST12Q-G-LT-ME-XX-10 Ident no. 6604070</p>	<p>Tel ataması</p>  <p>1 = GND 7 = n.c. 2 = Vsens 8 = shield 3 = CLK + 9 = n.c. 4 = CLK - 10 = n.c. 5 = Data + 11 = n.c. 6 = Data - 12 = n.c.</p>

LED display

LED	Color	Status	Meaning
D		OFF	No error message or diagnostics active.
	RED	ON	Failure of module bus communication. Check if more than 2 adjacent electronic modules are pulled. Relevant modules are located between gateway and this module.
	RED	FLASHING (0.5 Hz)	Upcoming module diagnostics
UP		OFF	No upward movement
	GREEN	ON	Upward movement
DN		OFF	No downward movement
	GREEN	ON	Downward movement

Data mapping

DATA	BYTE	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0	
Input	n	STS STOP	x	x	ERR PARA	STS UFLW	STS OFLW	ERR SSI	SSI DIAG	
	n+1	STS UP	STS DN	REL CMP2	FLAG CMP2	STS CMP2	REL CMP1	FLAG CMP1	STS CMP1	
	n+2	REG WR ACCEPT	REG WR AKN	x	x	SSI STS3	SSI STS2	SSI STS1	SSI STS0	
	n+3	REG RD ABORT	x	REG RD ADR (MSB to LSB)						
	n+4	Data byte 0								
	n+5	Data byte 1								
	n+6	Data byte 2								
	n+7	Data byte 3								
Output	m	STOP	x	x	x	x	x	x	x	
	m+1	x	x	x	CLR CMP2	EN CMP2	x	CLR CMP1	EN CMP1	
	m+2	REG WR	x	REG WR ADR						
	m+3	x	x	REG RD ADR						
	m+4	Data byte 0								
	m+5	Data byte 1								
	m+6	Data byte 2								
	m+7	Data byte 3								

n = Offset of input data; depending on extension of station and the corresponding fieldbus.

m = Offset of output data; depending on extension of station and the corresponding fieldbus.

With PROFIBUS, PROFINET and CANopen, the I/O data of this module is localized within the process data of the whole station via the hardware configuration tool of the fieldbus master.

With DeviceNet™, EtherNet/IP™ and Modbus TCP a detailed mapping table can be created with the TURCK configuration tool I/O-ASSISTANT.

Note:

A software function module is available for simple handling of the synchronous serial interface (abbreviated SSI). This function module is available for the CoDeSys programmable BL67 gateway.

The actual sequence of the data of the SSI modules in the process data of the higher-level control system may vary from that shown here. The sequence in Profibus systems is generally the reverse (byte 0 complies with byte 7 etc.).